



SVS Eco valve plug CI-9.4mm screw terminal

3-pol. + PE, max. 0,5mm², 5 -6mm


Form CI (9.4 mm)
max. 250 V AC/DC
without components
metric
field-wireable
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen

Kuvat

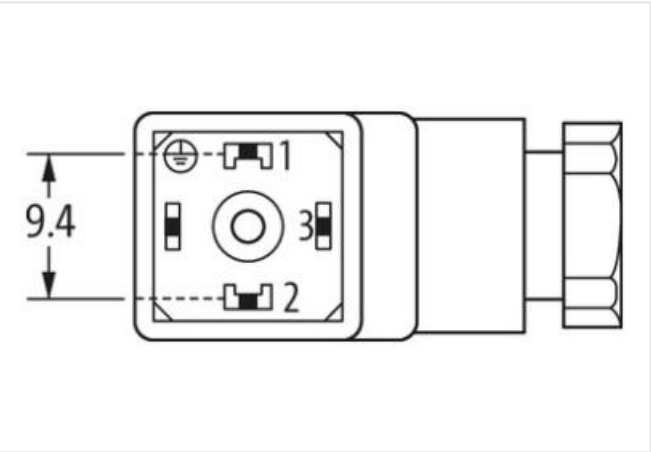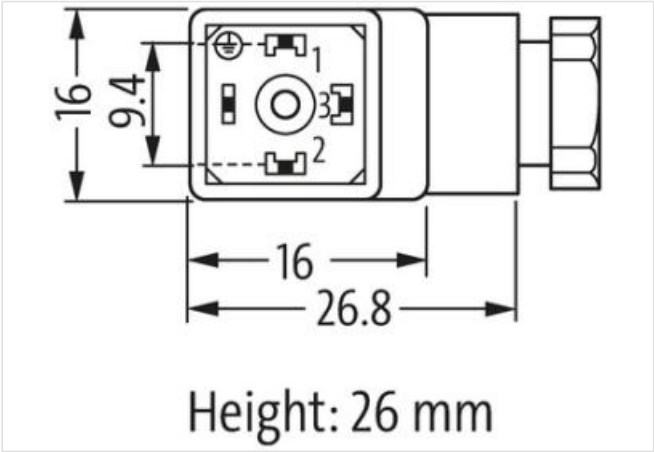

Tuote voi erota kuvassa olevasta

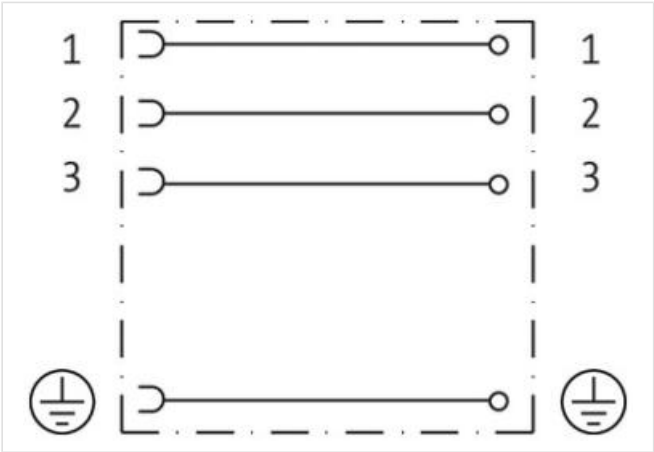

Side 1	
Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Kaupalliset tiedot	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102

ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
GTIN	4048879513715
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	6 A
Installation	
Connection cross section max.	0,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M12 x 1.5
Installation Pin assignment	
No. of poles	3 + PE
Device protection Electrical	
Additional condition protection degree	inserted, locked
Mechanical data Material data	
Material gasket	NBR
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	6 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.