

M12 male 90° A-cod. / MSUD valve plug A-18mm

PUR 5x0.34 gy UL/CSA 1m

⚠ NOTICE ⚠

PRODUCT IS DISCONTINUED. PLEASE HAVE A LOOK AT THE ALTERNATIVE PRODUCTS.

MSUD

Form A (18 mm) – M12, male 90°

24 V DC $\pm 25\%$

LED (red/green)

for pressure switches





Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)

Kuvat

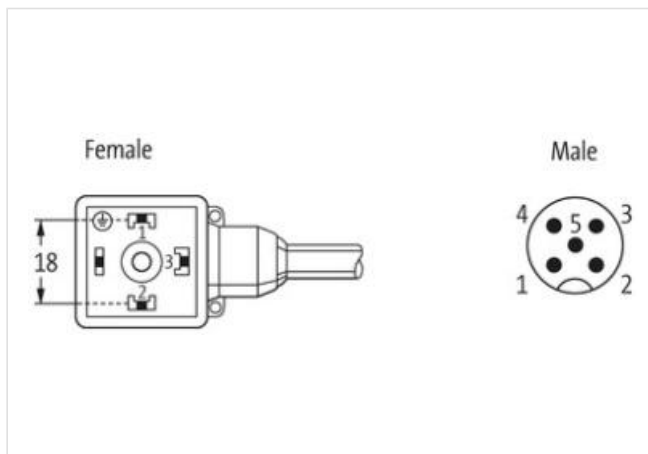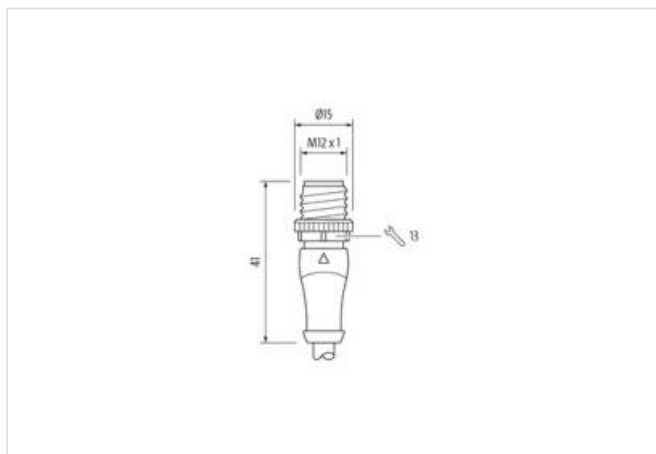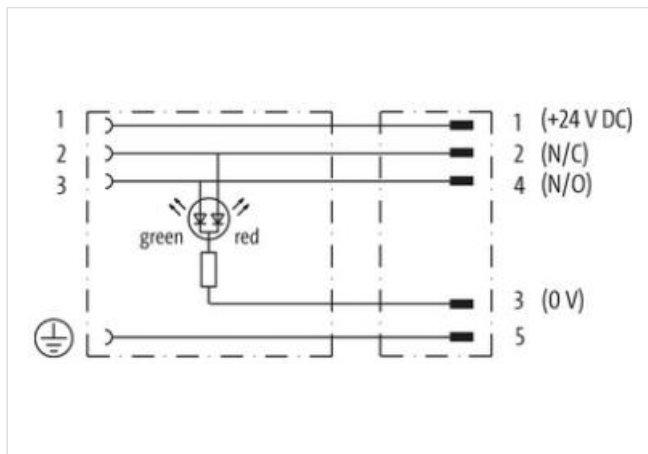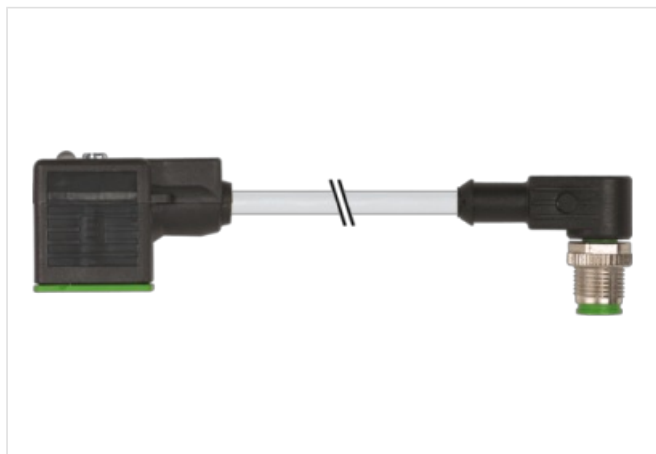

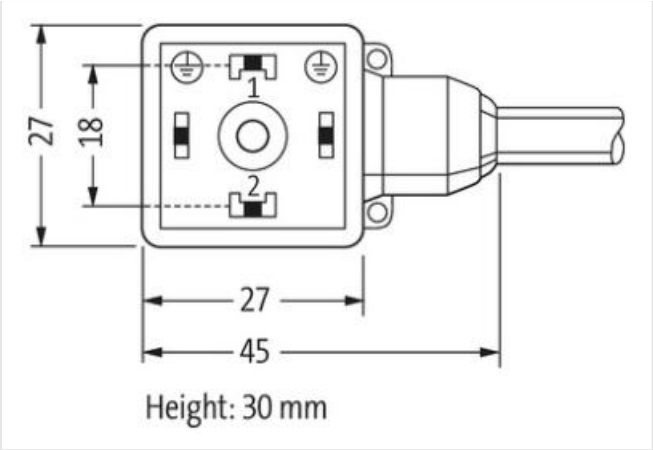

Tuote voi erota kuvassa olevasta



Cable length	1 m
Side 1	
Tightening torque	0,4 Nm
Family construction form	MSUD
Thread	M3
Degree of protection (EN IEC 60529)	IP66K, IP67
Side 2	
Tightening torque	0,6 Nm
Family construction form	M12
Thread	M12 x 1
Degree of protection (EN IEC 60529)	IP66K, IP67
Kaupalliset tiedot	
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060312
ECLASS-10.1	27060312
ECLASS-11.1	27060312
ECLASS-12.0	27060312
ETIM-5.0	EC001855
GTIN	4048879149723
Pakkauskoko	1
Tullinumero	85444290
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Current consumption max.	12 mA
Device protection Electrical	

Additional condition protection degree	inserted, screwed
--	-------------------

Rated surge voltage	0,8 kV
---------------------	--------

Mechanical data | Material data

Color housing	black
---------------	-------

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Mounting method	inserted, screwed
-----------------	-------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Additional condition temperature range	depending on cable quality
--	----------------------------

Cable

Cable identification	225
----------------------	-----

Cable Type	2 (PUR/PVC)
------------	-------------

Approval (cable)	UL (AWM-Style 20549/1731), CSA; CE conform
------------------	--

Cable weight [g/m]	54,78 g
--------------------	---------

Material wire	Cu wire, bare
---------------	---------------

Resistor (core)	max. 57 Ω/km (20 °C)
-----------------	----------------------

Single wire Ø (core)	0.1 mm
----------------------	--------

Construction (core)	42× 0.1 mm (multi-strand wire class 6)
---------------------	--

Diameter (core)	5× 0.34 mm ²
-----------------	-------------------------

AWG	similar to AWG 22
-----	-------------------

Material wire isolation	PVC
-------------------------	-----

Material property wire insulation	CFC-, cadmium-, silicone- and lead-free
-----------------------------------	---

Shore hardness wire isolation	43 ±5 D
-------------------------------	---------

Wire-Ø incl. isolation	1.25 mm ±5%
------------------------	-------------

Color/numbering of wires	br, bk, bl, wh, gnye longitudinally striped
--------------------------	---

Stranding combination	5 wires twisted around central filler
-----------------------	---------------------------------------

Shield	no
--------	----

Material jacket	PUR/PVC
-----------------	---------

Material property (jacket)	CFC-, halogen-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant, hydrolysis and microbial resistant
----------------------------	--

Shore hardness jacket	80 ±5 A (PVC-under jacket); 85 ±5 A (PUR-jacket)
-----------------------	--

Outer-Ø (jacket)	5.0 mm ±5%
------------------	------------

Color jacket	gray
--------------	------

chemical resistance	good resistance to oil, gasoline and chemicals
---------------------	--

Nominal voltage	UL 300 V AC
-----------------	-------------

Test voltage	2000 V AC
--------------	-----------

Current load capacity	to DIN VDE 0298-4
-----------------------	-------------------

Temperature range (fixed)	-30...+80 °C
---------------------------	--------------

Temperature range (mobile)	-5...+80 °C
----------------------------	-------------

Bending radius (fixed)	10× outer Ø
------------------------	-------------

Bending radius (dynamic)	15× outer Ø
--------------------------	-------------

No. of bending cycles (C-track)	max. 2 Mio. (25 °C)
---------------------------------	---------------------

Travel speed (C-track)	max. 3.3 m/s
------------------------	--------------

Acceleration (C-track)	max. 5 m/s ²
------------------------	-------------------------