

**T-Coupler Slimline M12 male/2xM12 female A-cod LED**

5-pol. / 2x 4-pol.

T-coupler (Slim Line)

Male straight – females straight

M12 – M12

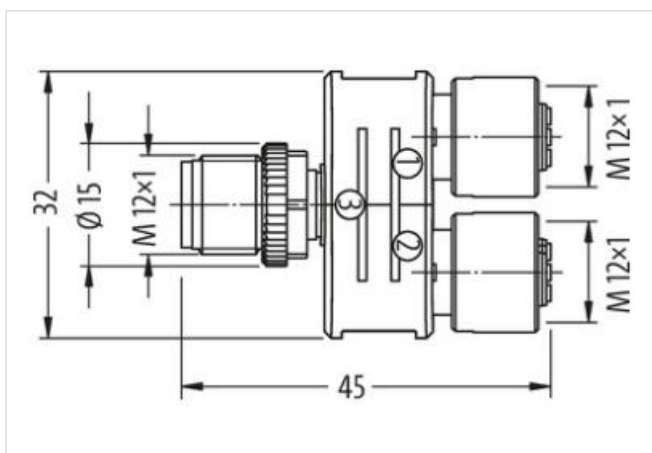
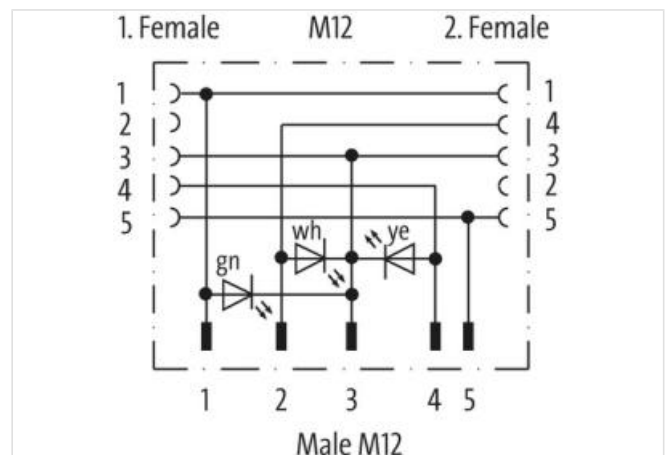
5-pole

3x LED (PNP)

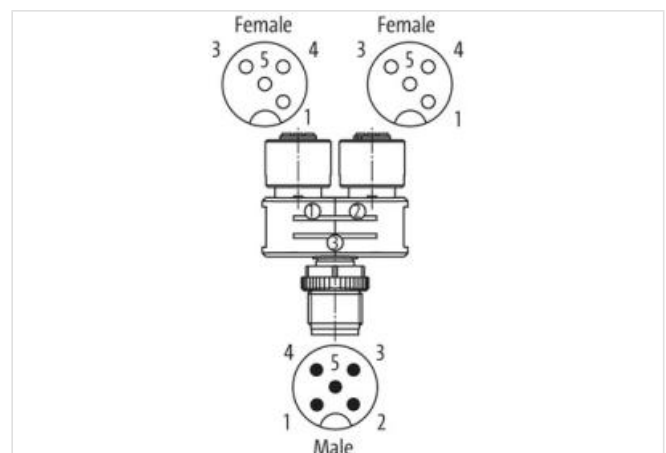
Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Degree of protection (EN IEC 60529)

IP67

**Side 2**

Degree of protection (EN IEC 60529) IP67

| Kaupalliset tiedot |               |
|--------------------|---------------|
| ECLASS-6.0         | 27143423      |
| ECLASS-6.1         | 27279221      |
| ECLASS-7.0         | 27440104      |
| ECLASS-8.0         | 27440104      |
| ECLASS-9.0         | 27440106      |
| ECLASS-10.1        | 27440106      |
| ECLASS-11.1        | 27440106      |
| ECLASS-12.0        | 27440106      |
| ETIM-5.0           | EC002062      |
| GTIN               | 4048879144858 |
| Pakkauskoko        | 1             |
| Tullinumero        | 85366990      |

| Electrical data   Supply              |      |
|---------------------------------------|------|
| Operating voltage DC                  | 24 V |
| Operating voltage DC min.             | 18 V |
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

| Diagnostics           |                      |
|-----------------------|----------------------|
| Status indication LED | green, white, yellow |

| Installation   Connection |         |
|---------------------------|---------|
| Tightening torque         | 0,6 Nm  |
| Mounting set              | M12 x 1 |

| Device protection   Electrical         |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

| Mechanical data   Mounting data |                                       |
|---------------------------------|---------------------------------------|
| Mounting method                 | inserted, screwed, Shaking protection |

| Environmental characteristics   Climatic |        |
|------------------------------------------|--------|
| Operating temperature min.               | -25 °C |
| Operating temperature max.               | 85 °C  |