

**M12 male on top A-cod. / MSUD double valve A-18mm**

PUR 3x0.75 ye UL/CSA 0m

Form A (18 mm) – M12, connector top entry

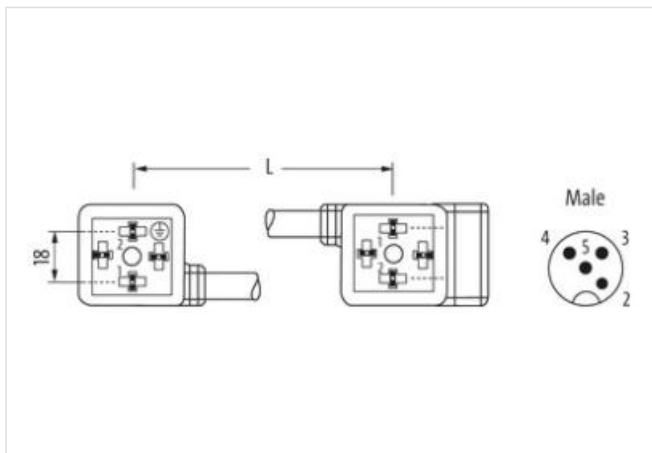
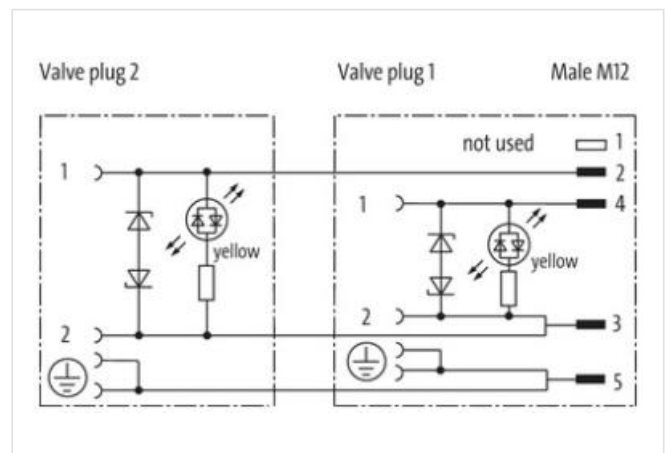
24 V AC/DC, M12 (4-pole)

LED and suppression

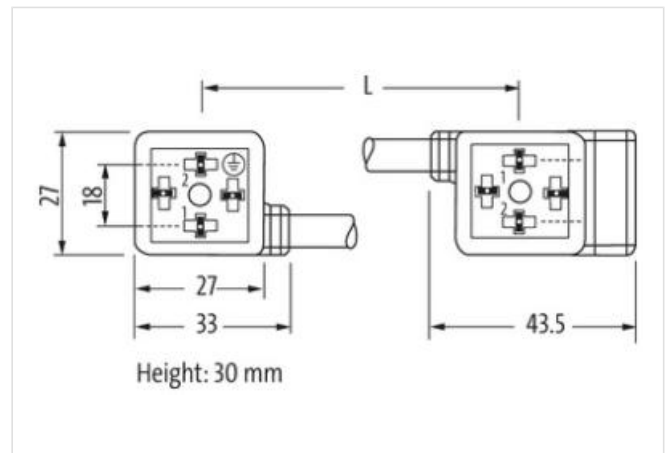
Connection cable L = 150 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Tightening torque 0,4 Nm

Thread M3

**Side 2**

|                                                 |                                                                                                                                                       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tightening torque                               | 0,4 Nm                                                                                                                                                |
| Thread                                          | M3                                                                                                                                                    |
| <b>Kaupalliset tiedot</b>                       |                                                                                                                                                       |
| ECLASS-6.0                                      | 27143423                                                                                                                                              |
| ECLASS-6.1                                      | 27279218                                                                                                                                              |
| ECLASS-7.0                                      | 27279218                                                                                                                                              |
| ECLASS-8.0                                      | 27279218                                                                                                                                              |
| ECLASS-9.0                                      | 27060312                                                                                                                                              |
| ECLASS-10.1                                     | 27060312                                                                                                                                              |
| ECLASS-11.1                                     | 27060312                                                                                                                                              |
| ECLASS-12.0                                     | 27060312                                                                                                                                              |
| ETIM-5.0                                        | EC001855                                                                                                                                              |
| GTIN                                            | 4048879144476                                                                                                                                         |
| Pakkauskoko                                     | 1                                                                                                                                                     |
| Tullinumero                                     | 85444290                                                                                                                                              |
| <b>Electrical data</b>                          |                                                                                                                                                       |
| Capacity CX                                     | 20 ms                                                                                                                                                 |
| <b>Electrical data   Supply</b>                 |                                                                                                                                                       |
| Operating voltage AC                            | 24 V                                                                                                                                                  |
| Operating voltage AC min.                       | 19,2 V                                                                                                                                                |
| Operating voltage AC max.                       | 28,8 V                                                                                                                                                |
| Operating voltage DC                            | 24 V                                                                                                                                                  |
| Operating voltage DC min.                       | 18 V                                                                                                                                                  |
| Operating voltage DC max.                       | 30 V                                                                                                                                                  |
| Cut-off peak voltage max.                       | 55 V                                                                                                                                                  |
| Current operating per contact max.              | 4 A                                                                                                                                                   |
| <b>Diagnostics</b>                              |                                                                                                                                                       |
| Status indication LED                           | yellow                                                                                                                                                |
| <b>Device protection   Electrical</b>           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)             | IP67                                                                                                                                                  |
| Additional condition protection degree          | inserted, screwed                                                                                                                                     |
| Pollution Degree                                | 3                                                                                                                                                     |
| Rated surge voltage                             | 0,8 kV                                                                                                                                                |
| Material group (IEC 60664-1)                    | I                                                                                                                                                     |
| <b>Mechanical data   Material data</b>          |                                                                                                                                                       |
| Color housing                                   | black                                                                                                                                                 |
| Material housing                                | Plastic                                                                                                                                               |
| <b>Mechanical data   Mounting data</b>          |                                                                                                                                                       |
| Mounting method                                 | inserted, screwed                                                                                                                                     |
| <b>Environmental characteristics   Climatic</b> |                                                                                                                                                       |
| Operating temperature min.                      | -25 °C                                                                                                                                                |
| Operating temperature max.                      | 85 °C                                                                                                                                                 |
| Additional condition temperature range          | depending on cable quality                                                                                                                            |
| <b>Important installation notes</b>             |                                                                                                                                                       |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| <b>Installation   Cable</b>                     |                                                                                                                                                       |
| Cable identification                            | 026                                                                                                                                                   |
| Cable Type                                      | 2                                                                                                                                                     |

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| Printing color of wire insulation        | white (isolation black)                          |
| Jacket Color                             | yellow                                           |
| Type of Certificate                      | cURus                                            |
| Amount stranding                         | 1                                                |
| Stranding                                | 3 wires twisted                                  |
| wire arrangement                         | black 1, black 2, green-yellow                   |
| Cable weight                             | 55 g/m                                           |
| Material jacket                          | PUR                                              |
| Shore hardness jacket                    | 85 ± 5 Shore A                                   |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, silicone-free |
| Outer-diameter (jacket)                  | 5,9 mm                                           |
| Tolerance outer diameter (sheath)        | ± 5 %                                            |
| Material inner jacket                    | PVC                                              |
| Color (inner jacket)                     | yellow                                           |
| Material wire insulation                 | PVC                                              |
| Amount wires                             | 3                                                |
| Outer diameter insulation                | 1,8 mm                                           |
| Outer diameter tolerance core insulation | ± 5 %                                            |
| Shore hardness wire insulation           | 43 ± 5 Shore D                                   |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, silicone-free |
| Printing color of wire insulation        | white (isolation black)                          |
| Amount strands (wire)                    | 42                                               |
| Diameter of single wires                 | 0,15 mm                                          |
| Conductor crosssection (wire)            | 0,75 mm <sup>2</sup>                             |
| Material conductor wire                  | Stranded copper wire, bare                       |
| Conductor type (wire)                    | strand class 6                                   |
| Traversing distance (C-track)            | 5 m @ 25 °C   horizontal                         |
| Nominal voltage AC max.                  | 300 V                                            |
| Current load capacity (standard)         | to DIN VDE 0298-4                                |
| Current load capacity min. wire          | 9,6 A                                            |
| Electrical resistance line constant wire | 26 Ω/km @ 20 °C                                  |
| Min. operating temperature (static)      | -30 °C                                           |
| Max. operating temperature (fixed)       | 80 °C                                            |
| Operating temperature min. (dynamic)     | -5 °C                                            |
| Operating temperature max. (dynamic)     | 80 °C                                            |
| chemical resistance                      | Good, application-related testing                |
| Gasoline resistance                      | Good, application-related testing                |
| Oil resistance                           | DIN EN 60811-404                                 |
| Bending radius (fixed)                   | 10 x Outer diameter                              |
| Bending radius (dynamic)                 | 15 x Outer diameter                              |
| Travel speed (C-track)                   | 2 Mio. @ 25 °C                                   |