

**Adaptor M12 male / M8 female A-cod.**

4-pol., conf. 1,2,3,4

Adapter

Male - female

M12 – M8, 4-pole




for M12 distribution box, 4-pole


M12, A-coded

Art-No. 7005 - M12/M8 Lite - (plastic hexagonal screw) on request

[Linkki tuotteeseen](#)

**Kuvat**

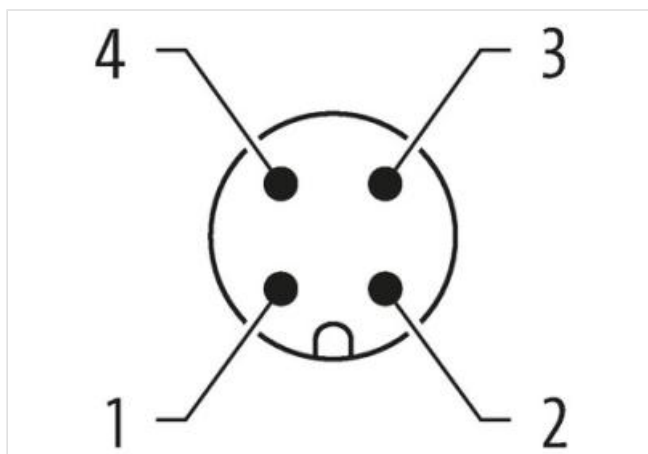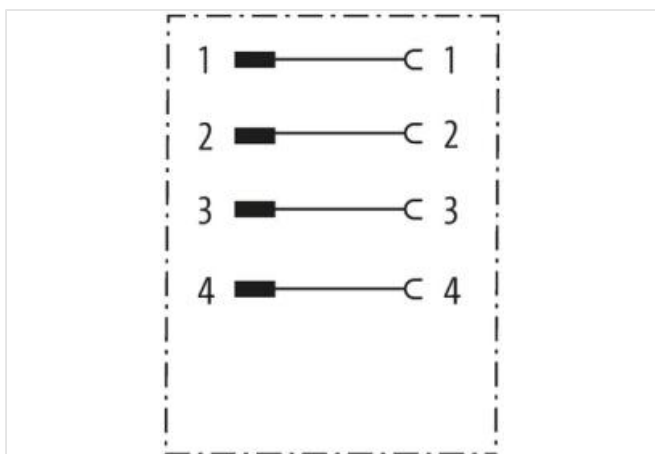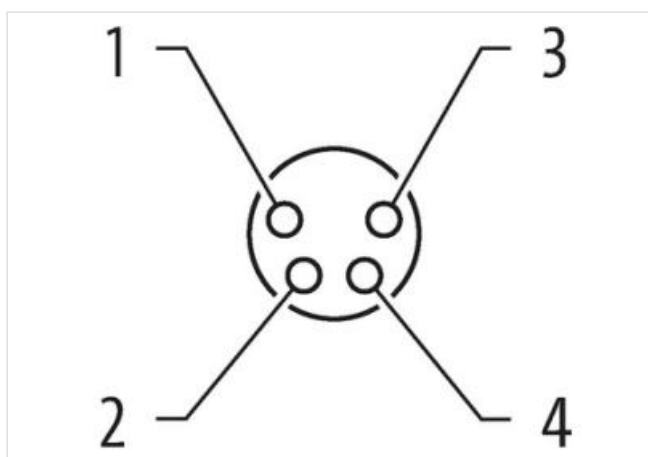

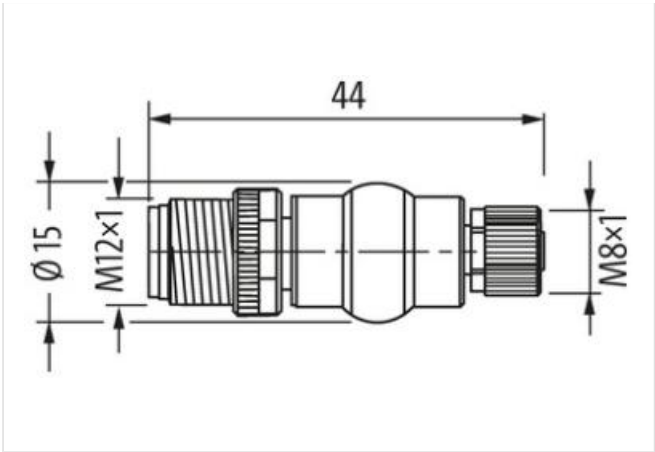

Tuote voi erota kuvassa olevasta



| Side 1                    |                   |
|---------------------------|-------------------|
| Tightening torque         | 0,6 Nm            |
| Mounting method           | inserted, screwed |
| Family construction form  | M12               |
| Thread                    | M12 x 1           |
| Coding                    | A                 |
| Material contact          | Copper alloy      |
| No. of poles              | 4                 |
| Width across flats        | SW13              |
| Side 2                    |                   |
| Tightening torque         | 0,4 Nm            |
| Mounting method           | inserted, screwed |
| Family construction form  | M8                |
| Thread                    | M8 x 1            |
| Coding                    | A                 |
| Material contact          | Copper alloy      |
| No. of poles              | 4                 |
| Width across flats        | SW9               |
| Kaupalliset tiedot        |                   |
| ECLASS-6.0                | 27143423          |
| ECLASS-6.1                | 27260702          |
| ECLASS-7.0                | 27440102          |
| ECLASS-8.0                | 27440102          |
| ECLASS-9.0                | 27440106          |
| ECLASS-10.1               | 27440102          |
| ECLASS-11.1               | 27440102          |
| ECLASS-12.0               | 27440106          |
| ETIM-5.0                  | EC001855          |
| GTIN                      | 4048879143196     |
| Pakkauskoko               | 1                 |
| Tullinumero               | 85366990          |
| Electrical data   Supply  |                   |
| Operating voltage AC max. | 50 V              |

|                                                 |                                                   |
|-------------------------------------------------|---------------------------------------------------|
| Operating voltage DC max.                       | 60 V                                              |
| Operating voltage AC max. (UL-listed)           | 30 V                                              |
| Operating voltage DC max. (UL-listed)           | 30 V                                              |
| Current operating per contact max.              | 4 A                                               |
| <b>Diagnostics</b>                              |                                                   |
| Status indication LED                           | no                                                |
| <b>Installation   Connection</b>                |                                                   |
| Mating cycles min.                              | 100                                               |
| <b>Device protection   Electrical</b>           |                                                   |
| Degree of protection (EN IEC 60529)             | IP67                                              |
| Additional condition protection degree          | inserted, screwed                                 |
| Pollution Degree                                | 3                                                 |
| Rated surge voltage                             | 1,5 kV                                            |
| Material group (IEC 60664-1)                    | I                                                 |
| <b>Mechanical data   Material data</b>          |                                                   |
| Coating contact                                 | gold plated                                       |
| Coating locking                                 | Nickel                                            |
| Material gasket                                 | FKM                                               |
| Material housing                                | PUR                                               |
| Locking material                                | Zinc die-casting                                  |
| <b>Mechanical data   Mounting data</b>          |                                                   |
| Mounting method                                 | Schraubgewinde                                    |
| <b>Environmental characteristics   Climatic</b> |                                                   |
| Operating temperature min.                      | -25 °C                                            |
| Operating temperature max.                      | 85 °C                                             |
| <b>Conformity</b>                               |                                                   |
| Product standard                                | DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8) |