

**M12 male 0° D-cod. / RJ45 male 0° shielded**

PUR 1x4xAWG22 shielded gn UL/CSA 0.4m

Male straight – male straight

M12 – RJ45, 4-pole

D-coded

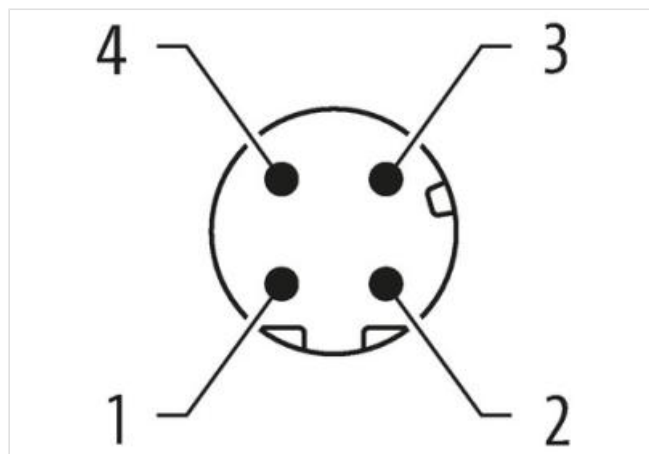
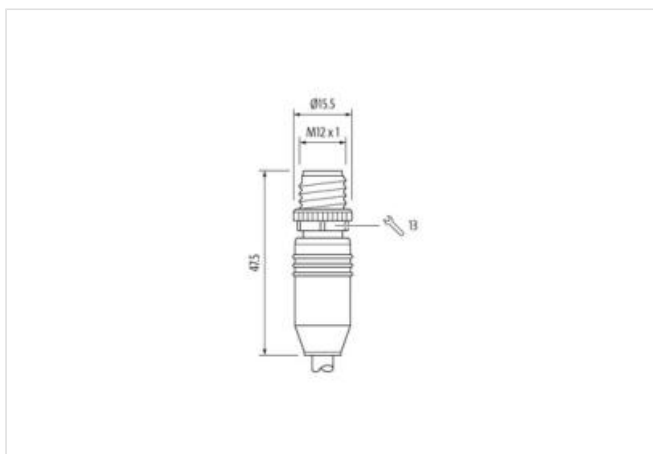
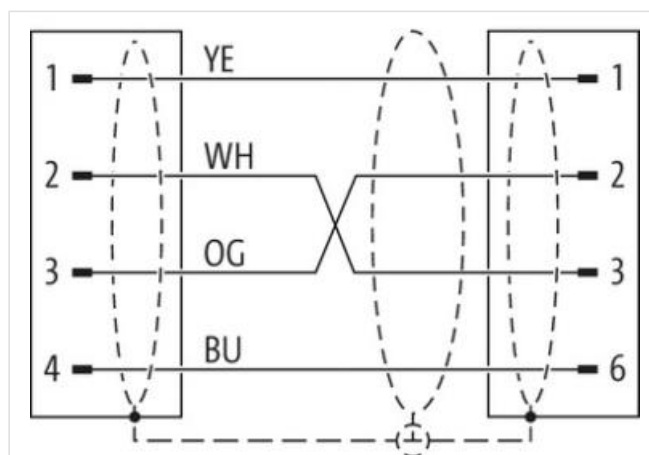
shielded

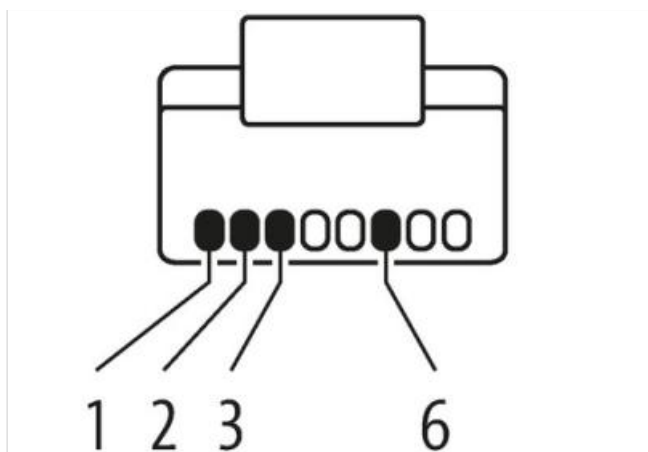
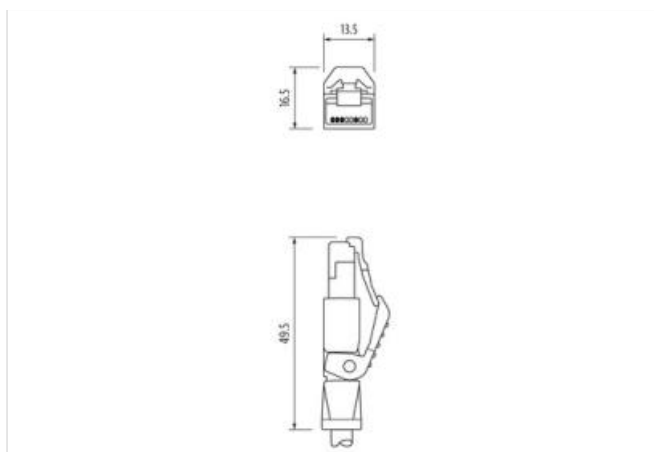
Ethernet CAT5

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**



Tuote voi erota kuvassa olevasta



Cable length 0,4 m

#### Side 1

|                                     |                   |
|-------------------------------------|-------------------|
| Tightening torque                   | 0,6 Nm            |
| Mounting method                     | inserted, screwed |
| Family construction form            | M12               |
| Thread                              | M12 x 1           |
| Cable outlet                        | straight          |
| Coding                              | D                 |
| Material                            | PUR               |
| No. of poles                        | 4                 |
| Width across flats                  | SW13              |
| Degree of protection (EN IEC 60529) | IP67              |

#### Side 2

|                                     |           |
|-------------------------------------|-----------|
| Mounting method                     | pluggable |
| Family construction form            | RJ45      |
| Cable outlet                        | straight  |
| Material                            | PUR       |
| No. of poles                        | 4         |
| Degree of protection (EN IEC 60529) | IP20      |

#### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27061801      |
| ECLASS-7.0  | 27061801      |
| ECLASS-8.0  | 27061801      |
| ECLASS-9.0  | 27061801      |
| ETIM-5.0    | EC001855      |
| GTIN        | 4048879784986 |
| Pakkauskoko | 1             |
| Tullinumero | 85444290      |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage DC max.          | 60 V  |
| Current operating per contact max. | 1,5 A |

#### Industrial communication

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.  
Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 19.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

|                     |                                                  |
|---------------------|--------------------------------------------------|
| Transfer parameters | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1) |
|---------------------|--------------------------------------------------|

|                             |            |
|-----------------------------|------------|
| Data transmission rate max. | 100 MBit/s |
|-----------------------------|------------|

**Industrial communication | Ethernet functionality**

|        |             |
|--------|-------------|
| duplex | Full duplex |
|--------|-------------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

|                  |   |
|------------------|---|
| Pollution Degree | 3 |
|------------------|---|

|                     |      |
|---------------------|------|
| Rated surge voltage | 1 kV |
|---------------------|------|

|                              |   |
|------------------------------|---|
| Material group (IEC 60664-1) | I |
|------------------------------|---|

**Mechanical data**

|                             |         |
|-----------------------------|---------|
| Contour for corrugated hose | without |
|-----------------------------|---------|

**Mechanical data | Material data**

|                 |          |
|-----------------|----------|
| Coating locking | Nickeled |
|-----------------|----------|

|                  |                  |
|------------------|------------------|
| Locking material | Zinc die-casting |
|------------------|------------------|

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 85 °C |
|----------------------------|-------|

|                                        |                            |
|----------------------------------------|----------------------------|
| Additional condition temperature range | depending on cable quality |
|----------------------------------------|----------------------------|

**Conformity**

|                  |                          |
|------------------|--------------------------|
| Product standard | DIN EN 61076-2-101 (M12) |
|------------------|--------------------------|

**Installation | Cable**

|                      |     |
|----------------------|-----|
| Cable identification | 794 |
|----------------------|-----|

|              |       |
|--------------|-------|
| Jacket Color | green |
|--------------|-------|

|                     |       |
|---------------------|-------|
| Type of Certificate | cURus |
|---------------------|-------|

|                  |   |
|------------------|---|
| Amount stranding | 1 |
|------------------|---|

|           |                               |
|-----------|-------------------------------|
| Stranding | 4 wires around Filler twisted |
|-----------|-------------------------------|

|                        |                      |
|------------------------|----------------------|
| Cable shielding (type) | copper braid, tinned |
|------------------------|----------------------|

|                            |      |
|----------------------------|------|
| Cable shielding (coverage) | 85 % |
|----------------------------|------|

|         |              |
|---------|--------------|
| Banding | Fleece, Foil |
|---------|--------------|

|        |     |
|--------|-----|
| Filler | yes |
|--------|-----|

|                  |                             |
|------------------|-----------------------------|
| wire arrangement | white, yellow, blue, orange |
|------------------|-----------------------------|

|              |           |
|--------------|-----------|
| Cable weight | 75,87 g/m |
|--------------|-----------|

|                 |     |
|-----------------|-----|
| Material jacket | PUR |
|-----------------|-----|

|                       |            |
|-----------------------|------------|
| Shore hardness jacket | 89 Shore A |
|-----------------------|------------|

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
|-----------------------------------|----------------------------------------------------------------|

|                         |        |
|-------------------------|--------|
| Outer-diameter (jacket) | 6,7 mm |
|-------------------------|--------|

|                                   |       |
|-----------------------------------|-------|
| Tolerance outer diameter (sheath) | ± 5 % |
|-----------------------------------|-------|

|                       |      |
|-----------------------|------|
| Material inner jacket | FRNC |
|-----------------------|------|

|                      |       |
|----------------------|-------|
| Color (inner jacket) | white |
|----------------------|-------|

|                          |    |
|--------------------------|----|
| Material wire insulation | PE |
|--------------------------|----|

|              |   |
|--------------|---|
| Amount wires | 4 |
|--------------|---|

|                           |         |
|---------------------------|---------|
| Outer diameter insulation | 1,55 mm |
|---------------------------|---------|

|                                          |       |
|------------------------------------------|-------|
| Outer diameter tolerance core insulation | ± 5 % |
|------------------------------------------|-------|

|                                |            |
|--------------------------------|------------|
| Shore hardness wire insulation | 65 Shore D |
|--------------------------------|------------|

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| Ingredient freeness wire insulation | lead-free, CFC-free, halogen-free |
|-------------------------------------|-----------------------------------|

|                       |   |
|-----------------------|---|
| Amount strands (wire) | 7 |
|-----------------------|---|

|                          |        |
|--------------------------|--------|
| Diameter of single wires | 22 AWG |
|--------------------------|--------|

|                               |        |
|-------------------------------|--------|
| Conductor crosssection (wire) | 22 AWG |
|-------------------------------|--------|

|                         |                            |
|-------------------------|----------------------------|
| Material conductor wire | Stranded copper wire, bare |
|-------------------------|----------------------------|

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,8 A                                                |
| Characteristic impedance                          | 100 $\Omega \pm 15 \%$                               |
| Electrical resistance line constant wire          | 55 $\Omega/\text{km}$ @ 20 °C                        |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Electrical capacity line constant (wire - wire)   | 52000 pF/km                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage (wire - shield)              | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -30 °C                                               |
| Operating temperature max. (dynamic)              | 70 °C                                                |
| Flame resistance                                  | UL 1581 § 1090   IEC 60332-2-2   UL 1581 § 1100 FT2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 6 x Outer diameter                                   |
| Bending radius (dynamic)                          | 12 x Outer diameter                                  |