




MODL.VARIO insert for coupling housing type B

8-pole M12, female, shielded

Insert - mobile housing
Female straight – male straight
M12, 8-pole
A-coded

[Linkki tuotteeseen](#)

Kuvat

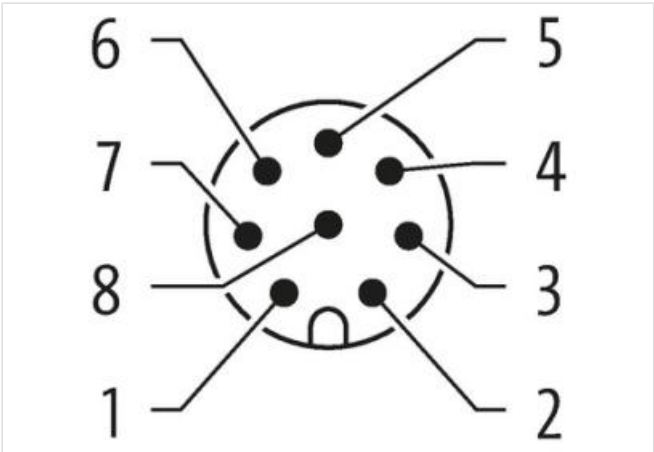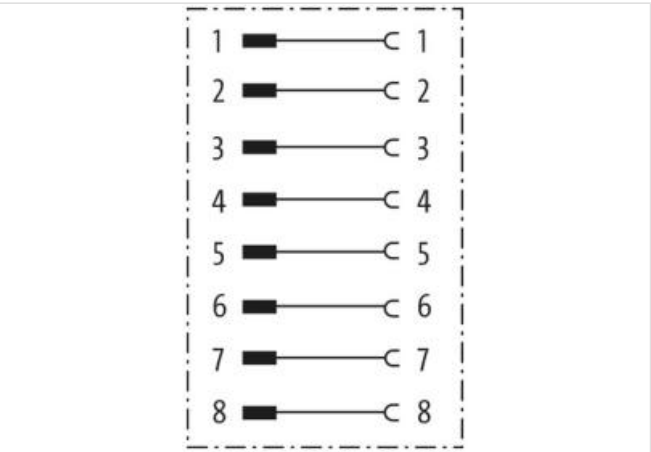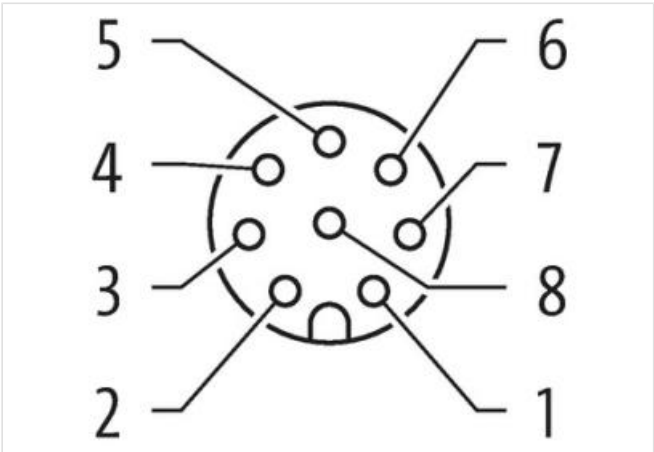

Tuote voi erota kuvassa olevasta

Side 1	
Family construction form	M12
Coding	A
Side 2	
Family construction form	M12
Coding	A
Kaupalliset tiedot	
ECLASS-6.0	27279221
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104

ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC001855
GTIN	4048879576543
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC max.	30 V
Operating voltage DC max.	30 V
Current operating per contact max.	2 A
Installation Connection	
Tightening torque	0,6 Nm
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67
Additional condition protection degree	inserted, screwed
Rated insulation voltage	800 V
Rated surge voltage	0,8 kV
Mechanical data Material data	
Coating housing	nickel plated
Material gasket	FKM
Material housing	Brass
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C