

**Adaptor M8 on top A-cod. / MSUD valve plug BI-11mm**

LED+Suppression 24 V AC/DC

Form BI (11 mm) – M8, connector top entry

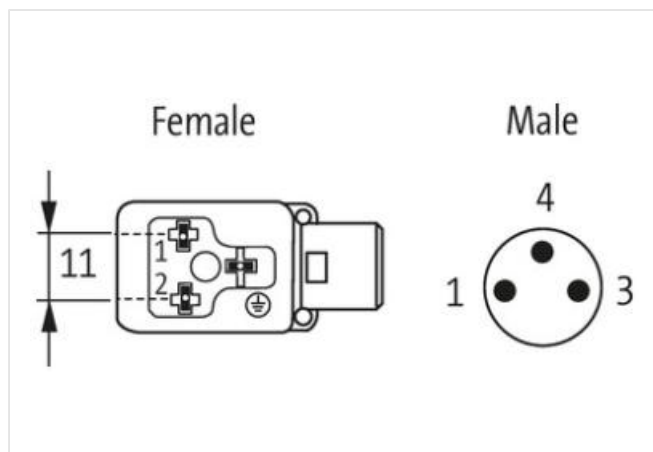
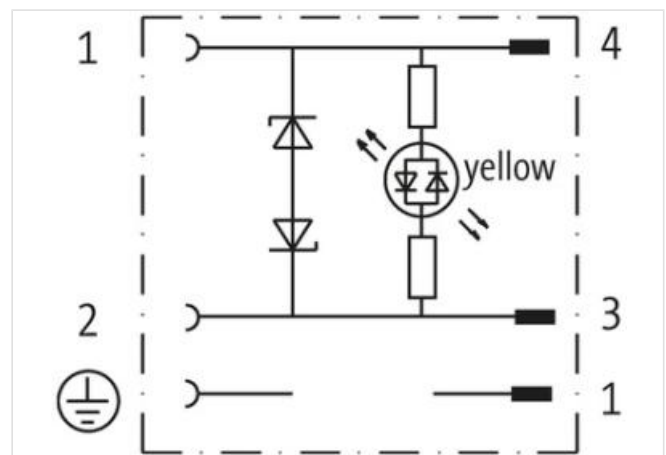
24 V AC  $\pm 20\%$  / DC  $\pm 25\%$ 

LED and suppression

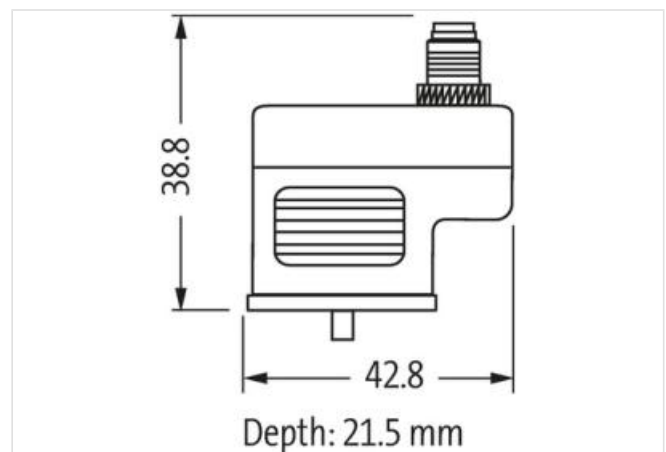
3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Linkki tuotteeseen****Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-7.0 | 27449001 |
| ECLASS-8.0 | 27449001 |
| ECLASS-9.0 | 27440321 |

|             |               |
|-------------|---------------|
| ECLASS-10.1 | 27440106      |
| ECLASS-11.1 | 27440106      |
| ECLASS-12.0 | 27440106      |
| ETIM-5.0    | EC001855      |
| GTIN        | 4048879115889 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

#### Electrical data | Supply

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |
| Current consumption max.           | 15 mA  |

#### Installation | Connection

|                   |         |
|-------------------|---------|
| Tightening torque | 0,4 Nm  |
| Mounting set      | M3 / M8 |

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 0,8 kV            |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |