

Cable connector IDC4-pol., 0,14 - 0,34mm², 3,5 - 6mm

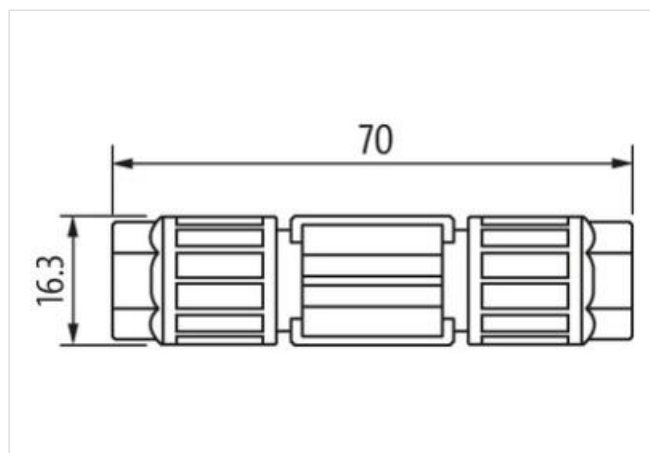
Sealing range (cable Ø)

3.5...6 mm

conductor

0.14 ... 0.25 mm²; 0.14 ... 0.34 mm² (flex)**[Linkki tuotteeseen](#)****Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Family construction form	M12
Degree of protection (EN IEC 60529)	IP65, IP67

Kaupalliset tiedot

ECLASS-6.0	27279220
ECLASS-6.1	27143423
ECLASS-7.0	27440390
ECLASS-8.0	27440390
ECLASS-9.0	27440390
ECLASS-10.1	27440390
ECLASS-11.1	27440390
ECLASS-12.0	27440390
ETIM-5.0	EC001855
GTIN	4048879872553
Pakkauskoko	1
Tullinumero	85366990

Electrical data | Supply

Operating voltage AC max.	125 V
Operating voltage DC max.	125 V
Current operating per contact max.	5 A

Diagnostics

Operating temperature min.	-40 °C
Operating temperature max.	80 °C