

Push Pull Power male 0° spring-cage connection5-pol., 0,75 - 2,5mm², 9 - 13mm

Male straight

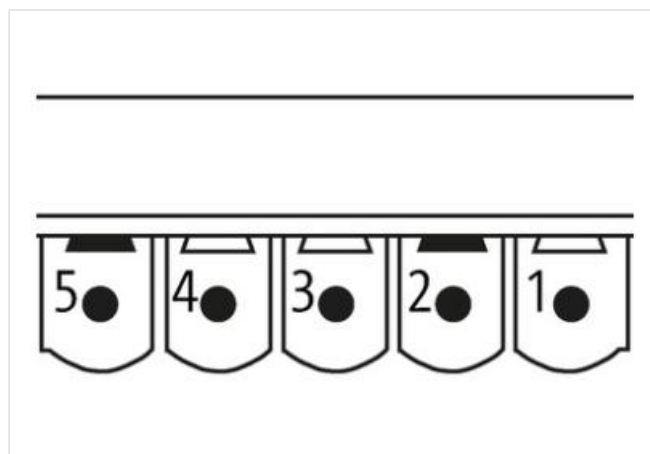
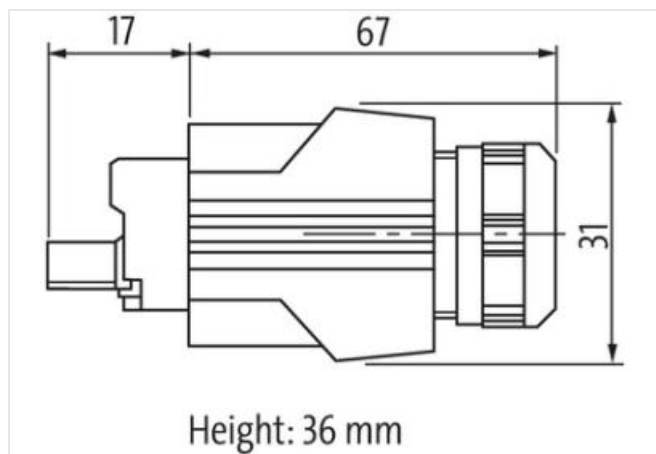
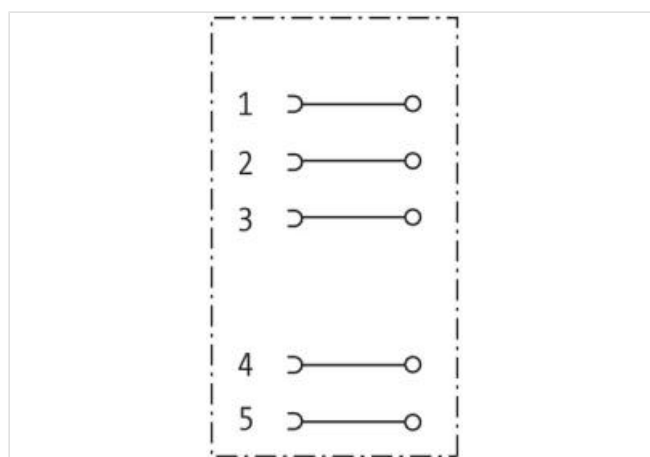
PPP, 5-pole

Spring clamp terminals

Connection cross section: 0.75...2.5 mm²

Push Pull Power

The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102

ECLASS-10.1	27440101
ECLASS-11.1	27440101
ECLASS-12.0	27440114
ETIM-5.0	EC002635
GTIN	4048879113915
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC max.	24 V
Operating voltage DC max.	24 V
Current operating per contact max.	16 A
Installation	
Connection cross section min.	0,75 mm²
Connection cross section max.	2,5 mm²
AWG number min.	18
AWG number max.	14
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	2
Rated surge voltage	4 kV
Mechanical data Material data	
Coating housing	Nickeled
Material housing	Zinc die-casting
Mechanical data Mounting data	
Clamping range min.	9 mm
Clamping range max.	13 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.