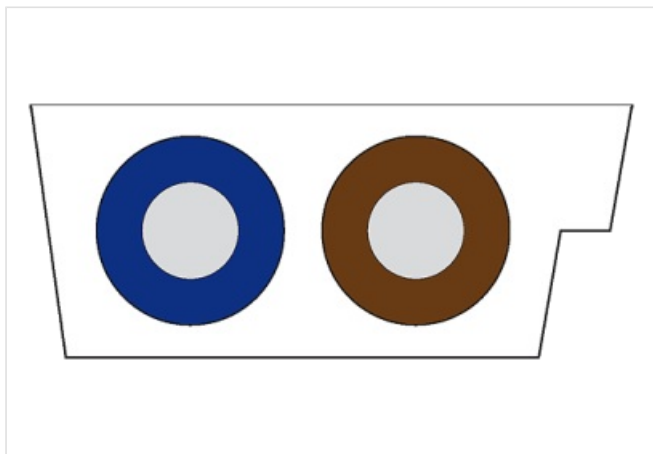


cable drum MASI Ø 500mm

PUR profile cable 2x1.5 bk 500m

PUR (UL/CSA)
 2× 1.5 mm²
 suitable for C-tracks
 5 Mio.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27062011
ECLASS-7.0	27062011
ECLASS-8.0	27062011
ECLASS-9.0	27062011
ETIM-5.0	EC001578
GTIN	4048879565813
Pakkauskoko	1
Tullinumero	85444993

Installation | Cable

Cable identification	784
Jacket Color	black
wire arrangement	brown, blue
Travel speed (C-track)	5 Mio.
Material jacket	PUR
Material wire insulation	PP
Amount wires	2
Conductor crosssection (wire)	1,5 mm ²
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C
Operating temperature min. (dynamic)	-20 °C
Operating temperature max. (dynamic)	80 °C
Flame resistance	IEC 60332-2-2 UL 1581 § 1090 UL 1581 § 1100 FT2
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing DIN EN 60811-404

Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	7,5 x Outer diameter