




M8 female receptable 0° D-cod. rear


4-pol., PCB pin, shielded

PCB connectors
Female straight
M8, 4-pole
D-coded
Shielded
THT-solder connection
Rear mounting


[Linkki tuotteeseen](#)

Kuvat

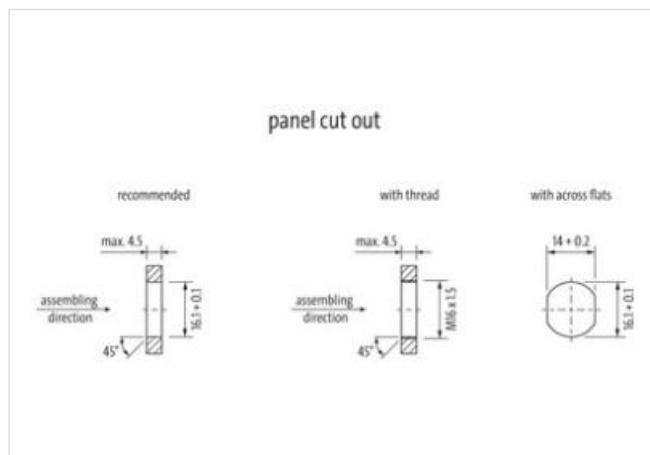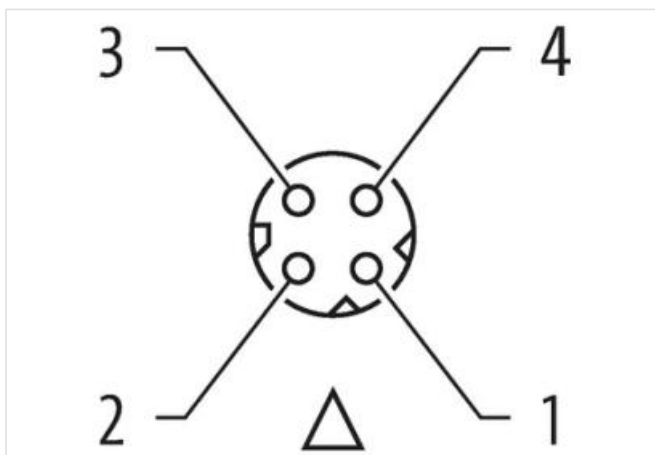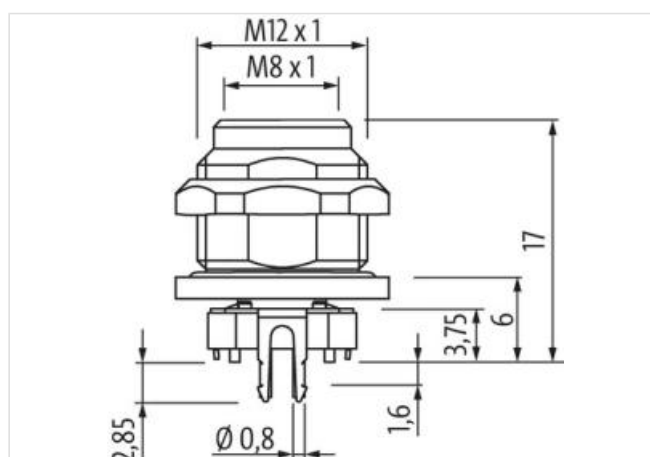

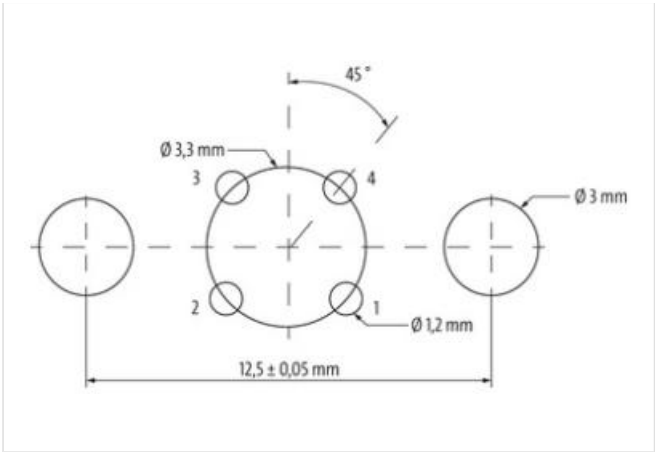

Tuote voi erota kuvassa olevasta



Side 1	
Coating contact	nickel plated
Family construction form	M8
Coding	D
Material contact	Brass
No. of poles	4
Width across flats	SW14
Kaupalliset tiedot	
ECLASS-6.0	27279218
ECLASS-6.1	27279220
ECLASS-7.0	27440103
ECLASS-8.0	27440103
ECLASS-9.0	27440109
ECLASS-10.1	27440109
ECLASS-11.1	27440109
ECLASS-12.0	27440109
ETIM-5.0	EC001855
GTIN	4048879906845
Pakkauskoko	10
Tullinumero	85366930
Electrical data Supply	
Operating voltage AC	50 V
Operating voltage DC	60 V
Current operating per contact max.	4 A
Industrial communication	
Transfer parameters	CAT5e, Class D (ISO/IEC 11801)
Installation Connection	
Connection information	THT-solder connection
Tightening torque	0,6 Nm
Mounting set	M12 x 1
Mating cycles min.	100
Device protection	

Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3/2
Insulation resistance min.	100 MΩ
Mechanical data Material data	
Coating housing	nickel plated
Material gasket	FPM
Material housing	Copper alloy
Material contact carrier	PA6
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	90 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.