

**T-Coupler M12 male / M12 female A-cod. V2A**

5-pol. / 2x 4-pol.

T-coupler

Male straight – females straight

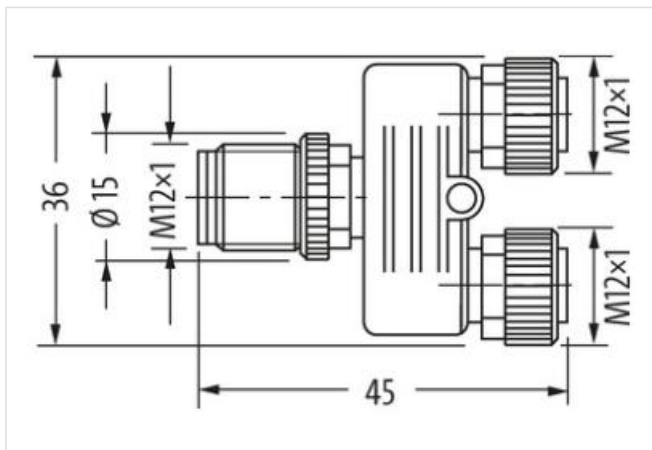
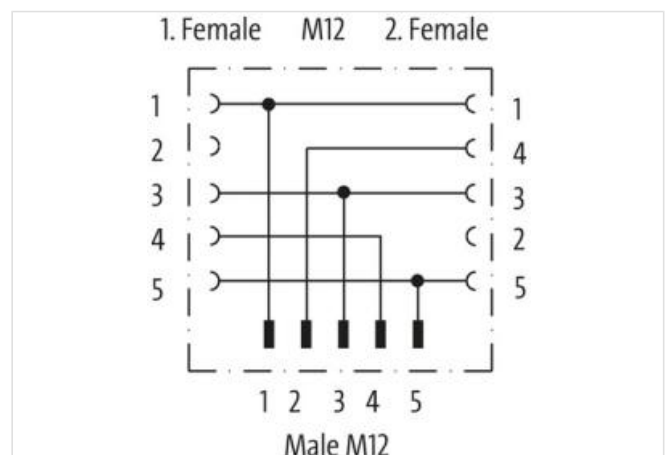
M12 – M12, 5-pole

Distribution function (NO)

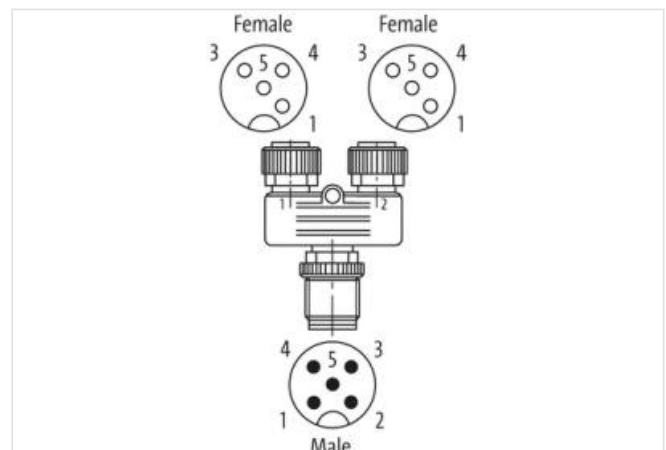
V2A nut/screw

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Linkki tuotteeseen](#)****Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

|                          |                    |
|--------------------------|--------------------|
| Tightening torque        | 0,6 Nm             |
| Mounting method          | screwed, pluggable |
| Family construction form | M12                |

|                                     |         |
|-------------------------------------|---------|
| Thread                              | M12 x 1 |
| Gender                              | female  |
| Coding                              | A       |
| No. of poles                        | 4       |
| Width across flats                  | SW13    |
| Degree of protection (EN IEC 60529) | IP67    |

**Side 2**

|                                     |                    |
|-------------------------------------|--------------------|
| Tightening torque                   | 0,6 Nm             |
| Mounting method                     | screwed, pluggable |
| Family construction form            | M12                |
| Thread                              | M12 x 1            |
| Gender                              | female             |
| Coding                              | A                  |
| No. of poles                        | 4                  |
| Width across flats                  | SW13               |
| Degree of protection (EN IEC 60529) | IP67               |

**Side 3**

|                                     |                    |
|-------------------------------------|--------------------|
| Mounting method                     | screwed, pluggable |
| Family construction form            | M12                |
| Coding                              | A                  |
| No. of poles                        | 5                  |
| Degree of protection (EN IEC 60529) | IP67               |
| Gender                              | male               |
| Tightening torque                   | 0,6 Nm             |
| Width across flats                  | SW13               |
| Thread                              | M12 x 1            |

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27279221      |
| ECLASS-6.1  | 27279221      |
| ECLASS-7.0  | 27440104      |
| ECLASS-8.0  | 27440104      |
| ECLASS-9.0  | 27440106      |
| ECLASS-10.1 | 27440106      |
| ECLASS-11.1 | 27440106      |
| ECLASS-12.0 | 27440106      |
| ETIM-5.0    | EC002635      |
| GTIN        | 4048879111775 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 60 V |
| Operating voltage DC max.          | 60 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

**Mechanical data | Material data**

