

Adaptor M12 male / M8 female A-cod. V2A

4-pol., conf. 1,2,3,4

Adapter

Male - female

M12 – M8, 4-pole




Stainless steel 1.4305 (V2A/M12) / 1.4404 (V4A/M8)


for M12 distribution box, 4-pole

Art-No. 7005 - M12/M8 Lite - (plastic hexagonal screw) on request

[Linkki tuotteeseen](#)

Kuvat

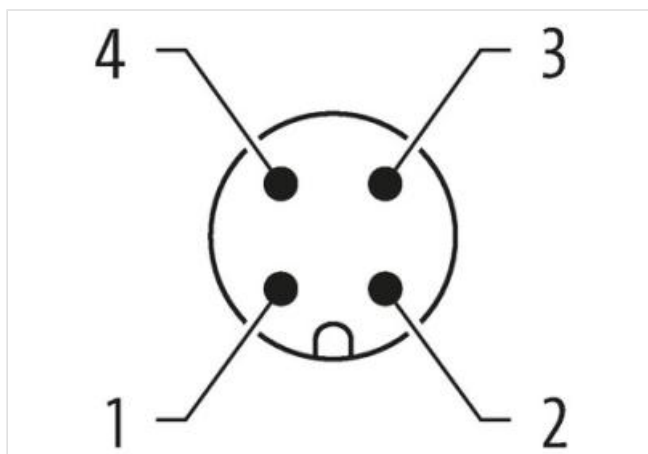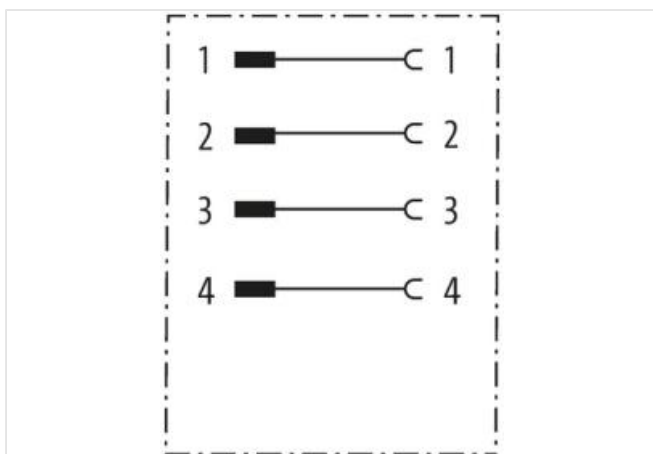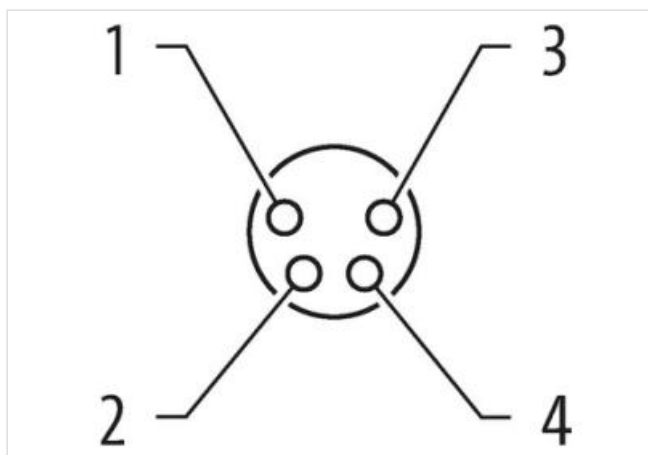

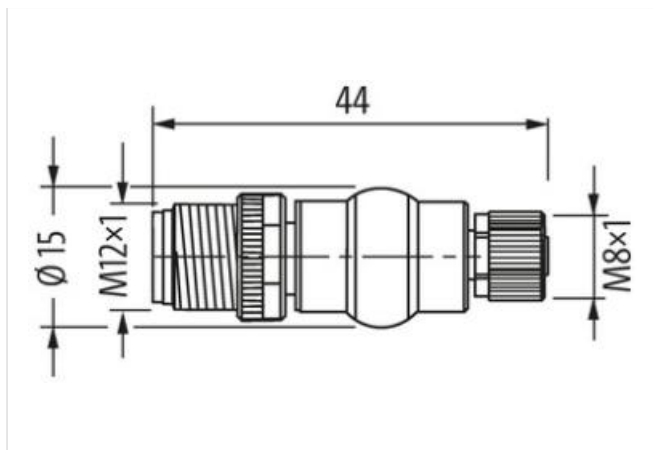

Tuote voi erota kuvassa olevasta



Side 1

Tightening torque	0,6 Nm
Family construction form	M12
Thread	M12 x 1
Width across flats	SW13

Side 2

Tightening torque	0,4 Nm
Family construction form	M8
Thread	M8 x 1
Width across flats	SW9

Kaupalliset tiedot

ECLASS-6.0	27279220
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440106
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440106
ETIM-5.0	EC001855
GTIN	4048879318242
Pakkauskoko	1
Tullinumero	85366990

Electrical data | Supply

Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	30 V
Current operating per contact max.	4 A

Diagnostics

Status indication LED	no
-----------------------	----

Installation | Connection

Family construction form	M12
Mating cycles min.	100
Installation Pin assignment	
Coding	A
No. of poles	4
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	screwed, mounted
Pollution Degree	3
Rated surge voltage	1,5 kV
Material group (IEC 60664-1)	I
Mechanical data Material data	
Coating contact	gold plated
Material gasket	FKM
Material housing	PUR
Material contact	Copper alloy
Locking material	Stainless steel 1.4305 (V2A)
Locking material screw	Stainless steel 1.4404 (V4A)
Mechanical data Mounting data	
Mounting method	inserted, screwed
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Conformity	
Product standard	DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8)