


A10 Bulkhead mounted h., IP65

Single locking lever m.

A10  
Bulkhead mounted housing  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Linkki tuotteeseen

Kuvat

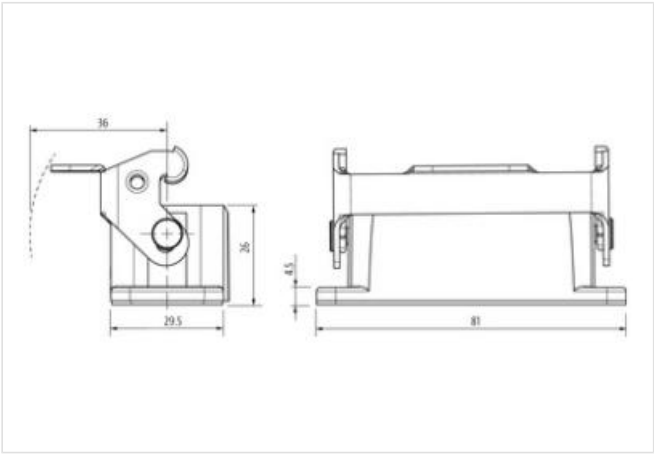

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27143424      |
| ECLASS-6.1  | 27261203      |
| ECLASS-7.0  | 27440202      |
| ECLASS-8.0  | 27440202      |
| ECLASS-9.0  | 27440202      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879643030 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

Installation | Connection

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |                          |
|--------------|--------------------------|
| Housing type | Bulkhead mounted housing |
|--------------|--------------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
| Coating locking | verzinkt      |
| Material gasket | NBR           |

|                                          |                      |
|------------------------------------------|----------------------|
| Material housing                         | Aluminum die casting |
| Locking material                         | Steel                |
| Mechanical data   Mounting data          |                      |
| Size                                     | A10                  |
| Height                                   | 26 mm                |
| Width                                    | 29,5 mm              |
| Depth                                    | 81 mm                |
| Looking techniques                       | Single locking lever |
| Environmental characteristics   Climatic |                      |
| Operating temperature min.               | -40 °C               |
| Operating temperature max.               | 100 °C               |
| Climatic category (EN IEC 60068-1)       | 40/100/21            |