

A16 Bulkhead mounted h., IP65

Single locking lever m., p-cover

A16

Bulkhead mounted housing

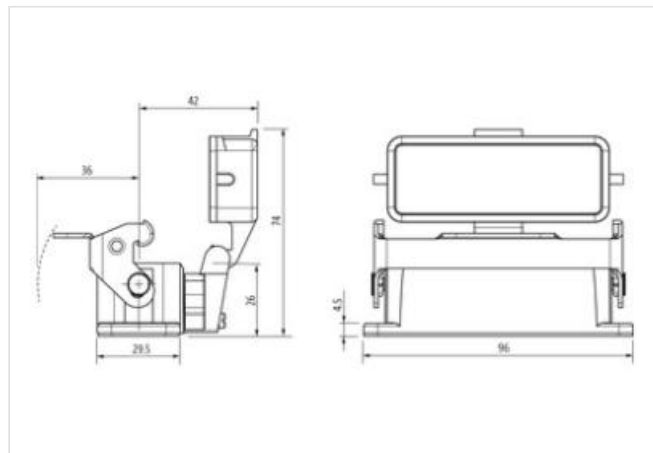
Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879643580
Pakkauskoko	1
Tullinumero	85389099

Installation | Connection

Mating cycles min.	500
--------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Bulkhead mounted housing
--------------	--------------------------

Mechanical data | Material data

Coating housing	powder-coated
Coating locking	verzinkt
Material gasket	NBR

Material housing	Aluminum die casting
Material protective cover	Plastic
Locking material	Steel
Mechanical data Mounting data	
Size	A16
Height	26 mm
Width	29,5 mm
Depth	96 mm
Looking techniques	Single locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21