


A3 Coupling h., IP65

Single locking lever m., top entry M20

A3  
Coupling housing (low)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Linkki tuotteeseen

Kuvat

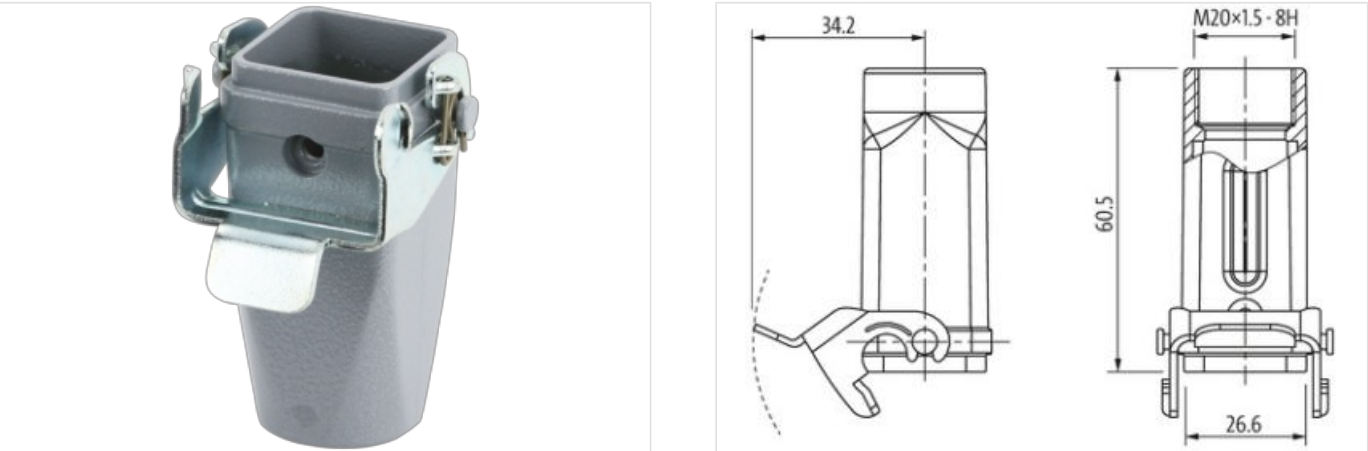

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27279221      |
| ECLASS-7.0  | 27440104      |
| ECLASS-8.0  | 27440104      |
| ECLASS-9.0  | 27440102      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879716826 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

Installation

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M20 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |                  |
|--------------|------------------|
| Housing type | Coupling housing |
|--------------|------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                                                 |                      |
|-------------------------------------------------|----------------------|
| Coating locking                                 | verzinkt             |
| Material housing                                | Zinc die-casting     |
| Locking material                                | Steel                |
| <b>Mechanical data   Mounting data</b>          |                      |
| Size                                            | A3                   |
| Height                                          | 60,5 mm              |
| Width                                           | 26,6 mm              |
| Depth                                           | 26,6 mm              |
| Looking techniques                              | Single locking lever |
| <b>Environmental characteristics   Climatic</b> |                      |
| Operating temperature min.                      | -40 °C               |
| Operating temperature max.                      | 100 °C               |
| Climatic category (EN IEC 60068-1)              | 40/100/21            |