

**B10 Coupling h., high profile, IP65**

Double locking lever m., top entry M25

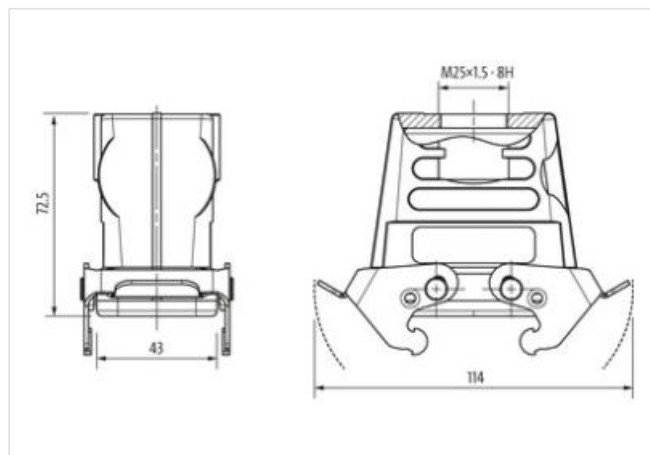
B10

Coupling housing (high)

Double locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

**[Linkki tuotteeseen](#)****Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27143424      |
| ECLASS-6.1  | 27261203      |
| ECLASS-7.0  | 27440202      |
| ECLASS-8.0  | 27440202      |
| ECLASS-9.0  | 27440202      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879644983 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

**Installation**

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

**Installation | Connection**

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

**Device protection | Electrical**

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

**Mechanical data**

|              |                  |
|--------------|------------------|
| Housing type | Coupling housing |
|--------------|------------------|

**Mechanical data | Material data**

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B10 |
|------|-----|

|        |         |
|--------|---------|
| Height | 72,5 mm |
|--------|---------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 114 mm |
|-------|--------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|