

**B6 Surface mounted h., IP68**

Screw locking, side entry M32

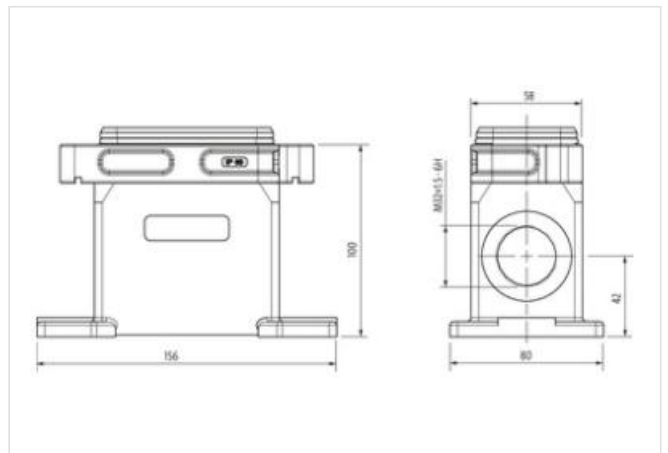
B6

Surface mounted housing

Screw locking

IP68

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27143424      |
| ECLASS-6.1  | 27261203      |
| ECLASS-7.0  | 27440202      |
| ECLASS-8.0  | 27440202      |
| ECLASS-9.0  | 27440202      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879647335 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

**Installation**

Cable outlet laterally

**Installation | Connection**

|                    |     |
|--------------------|-----|
| Mounting set       | M32 |
| Mating cycles min. | 500 |

**Device protection | Electrical**

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP68                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

**Mechanical data**

Housing type Surface mounted housing

**Mechanical data | Material data**

|                                                 |                      |
|-------------------------------------------------|----------------------|
| Coating housing                                 | powder-coated        |
| Material gasket                                 | Silicon              |
| Material housing                                | Aluminum die casting |
| Locking material                                | Stainless steel      |
| <b>Mechanical data   Mounting data</b>          |                      |
| Size                                            | B6                   |
| Mounting method                                 | Screw locking        |
| Height                                          | 100 mm               |
| Width                                           | 80 mm                |
| Depth                                           | 156 mm               |
| <b>Environmental characteristics   Climatic</b> |                      |
| Operating temperature min.                      | -40 °C               |
| Operating temperature max.                      | 125 °C               |
| Climatic category (EN IEC 60068-1)              | 40/125/21            |