

## B10 Surface mounted h., high profile, IP65

Single locking lever m., 2 entries M25, p-cover

B10

Surface mounted housing (high)


Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

### [Linkki tuotteeseen](#)

#### Kuvat

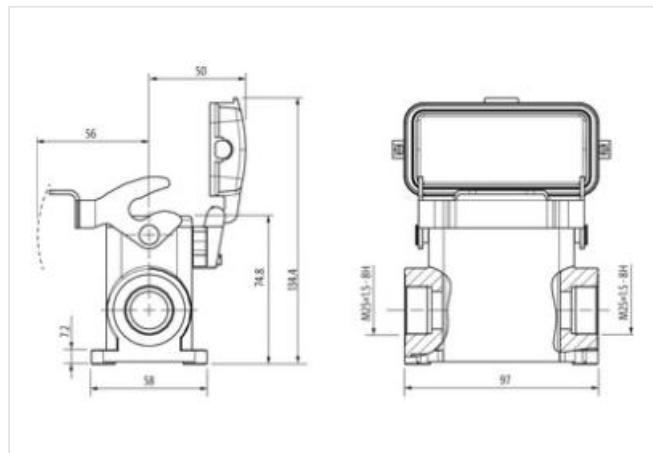

Tuote voi erota kuvassa olevasta

#### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27143424      |
| ECLASS-6.1  | 27261203      |
| ECLASS-7.0  | 27440202      |
| ECLASS-8.0  | 27440202      |
| ECLASS-9.0  | 27440202      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879646277 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

#### Installation

|              |              |
|--------------|--------------|
| Cable outlet | double-sided |
|--------------|--------------|

#### Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

#### Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

#### Mechanical data

|              |                         |
|--------------|-------------------------|
| Housing type | Surface mounted housing |
|--------------|-------------------------|

#### Mechanical data | Material data

|                           |                      |
|---------------------------|----------------------|
| Coating housing           | powder-coated        |
| Coating locking           | verzinkt             |
| Material gasket           | NBR                  |
| Material housing          | Aluminum die casting |
| Material protective cover | Plastic              |
| Locking material          | Steel                |

**Mechanical data | Mounting data**

|                    |                      |
|--------------------|----------------------|
| Size               | B10                  |
| Height             | 74,8 mm              |
| Width              | 58 mm                |
| Depth              | 97 mm                |
| Looking techniques | Single locking lever |

**Environmental characteristics | Climatic**

|                                    |           |
|------------------------------------|-----------|
| Operating temperature min.         | -40 °C    |
| Operating temperature max.         | 100 °C    |
| Climatic category (EN IEC 60068-1) | 40/100/21 |