

B10 Surface mounted h., high profile, IP65

Double locking lever m.,2 entries M25

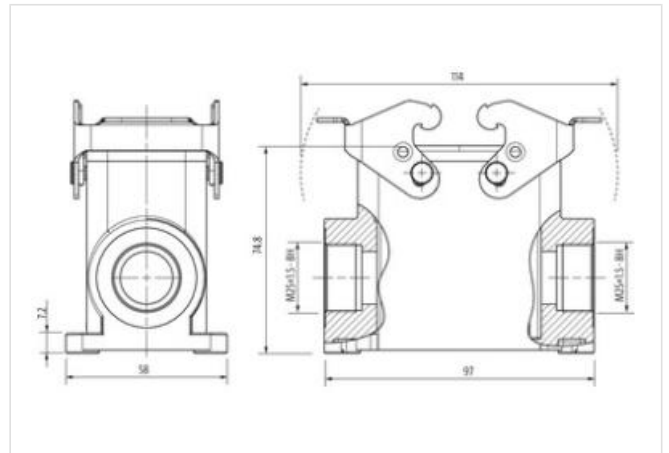
B10

Surface mounted housing (high)

Double locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879646246
Pakkauskoko	1
Tullinumero	85389099

Installation

Cable outlet	double-sided
--------------	--------------

Installation | Connection

Mounting set	M25
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Surface mounted housing
--------------	-------------------------

Mechanical data | Material data

Coating housing	powder-coated
Coating locking	verzinkt
Material gasket	NBR
Material housing	Aluminum die casting
Locking material	Steel
Mechanical data Mounting data	
Size	B10
Height	74,8 mm
Width	58 mm
Depth	97 mm
Looking techniques	Double locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21