

B10 Surface mounted h., low profile, IP65

Single locking lever m., side entry M20, p-cover

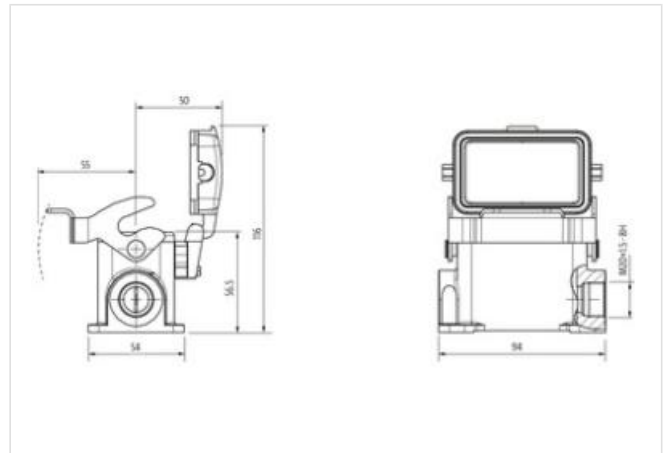
B10

Surface mounted housing (low)

Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879646253
Pakkauskoko	1
Tullinumero	85389099

Installation

Cable outlet laterally

Installation | Connection

Mounting set M20

Mating cycles min. 500

Device protection | Electrical

Degree of protection (EN IEC 60529) IP65

Additional condition protection degree inserted, locked, with screw connection

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material gasket	NBR
-----------------	-----

Material housing	Aluminum die casting
------------------	----------------------

Material protective cover	Plastic
---------------------------	---------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	B10
------	-----

Height	56,5 mm
--------	---------

Width	54 mm
-------	-------

Depth	94 mm
-------	-------

Looking techniques	Single locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------