


B24 Surface mounted h., IP68

Screw locking, side entry M50

B24
Surface mounted housing
Protection IP68
Screw locking
Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)

Kuvat

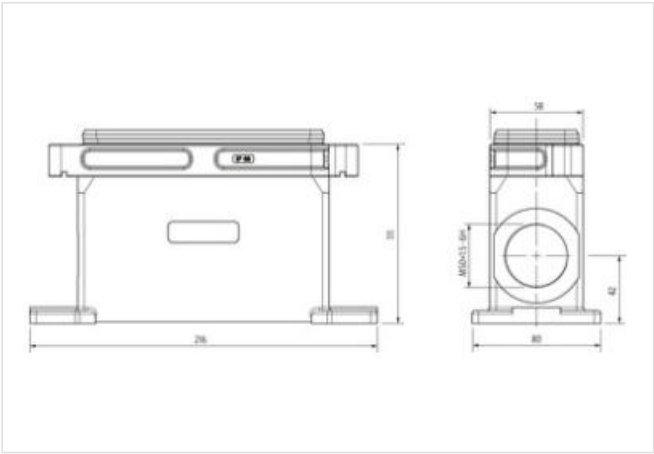

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27143424
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ECLASS-9.0	27440209
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4065909051610
Pakkauskoko	1
Tullinumero	85389099

Installation

Cable outlet laterally

Installation | Connection

Mounting set	M50
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

Coating housing powder-coated

Material gasket	Silicon
Material housing	Aluminum die casting
Locking material	Stainless steel
Mechanical data Mounting data	
Size	B24
Mounting method	Screw locking
Height	111 mm
Width	80 mm
Depth	216 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21