

### A3 Hood, IP65


Single locking lever, side entry M20

A3  
Hood  
Single locking lever  
IP65

Technical data will be only guaranteed with Murrelektronik components.

#### [Linkki tuotteeseen](#)

##### Kuvat

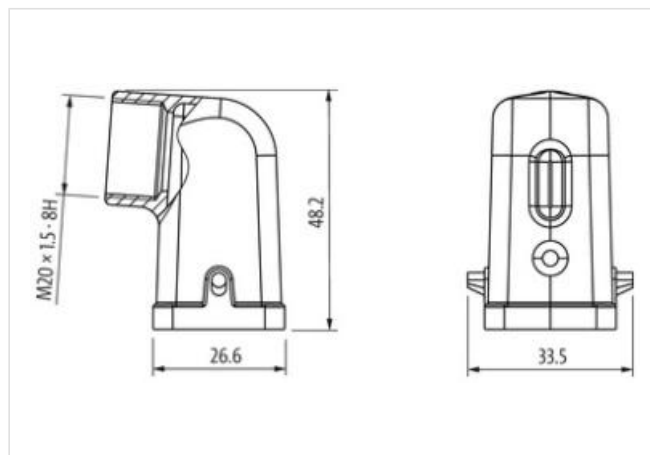

Tuote voi erota kuvassa olevasta

##### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27279221      |
| ECLASS-6.1  | 27261203      |
| ECLASS-7.0  | 27440202      |
| ECLASS-8.0  | 27440202      |
| ECLASS-9.0  | 27440202      |
| ECLASS-10.1 | 27440202      |
| ECLASS-11.1 | 27440202      |
| ECLASS-12.0 | 27440202      |
| ETIM-5.0    | EC000437      |
| GTIN        | 4048879716802 |
| Pakkauskoko | 1             |
| Tullinumero | 85389099      |

##### Installation

|              |           |
|--------------|-----------|
| Cable outlet | laterally |
|--------------|-----------|

##### Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M20 |
| Mating cycles min. | 500 |

##### Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

##### Mechanical data

|              |      |
|--------------|------|
| Housing type | Hood |
|--------------|------|

##### Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                  |                  |
|------------------|------------------|
| Material housing | Zinc die-casting |
|------------------|------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |    |
|------|----|
| Size | A3 |
|------|----|

|        |         |
|--------|---------|
| Height | 48,2 mm |
|--------|---------|

|       |         |
|-------|---------|
| Width | 26,6 mm |
|-------|---------|

|       |         |
|-------|---------|
| Depth | 33,4 mm |
|-------|---------|

|                    |                      |
|--------------------|----------------------|
| Locking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|