

B16 Hood, IP68

Screw locking, side entry M40

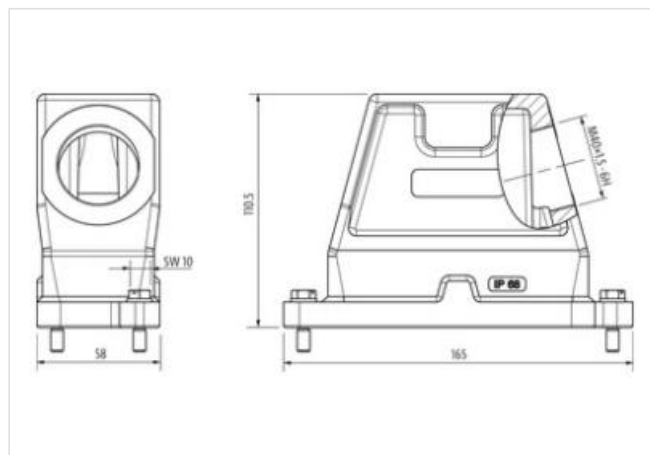
B16

Hood

Screw locking

IP68

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879647434
Pakkauskoko	1
Tullinumero	85389099

Installation

Cable outlet	laterally
--------------	-----------

Installation | Connection

Tightening torque	4 Nm
Mounting set	M40
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Hood
--------------	------

Mechanical data Material data	
Coating housing	powder-coated
Material gasket	Silicon
Material housing	Aluminum die casting
Locking material	Stainless steel
Mechanical data Mounting data	
Size	B16
Mounting method	Screw locking
Height	110,5 mm
Width	58 mm
Depth	165 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21