

B24 Hood, high profile, IP67

Double locking lever, side entry M40

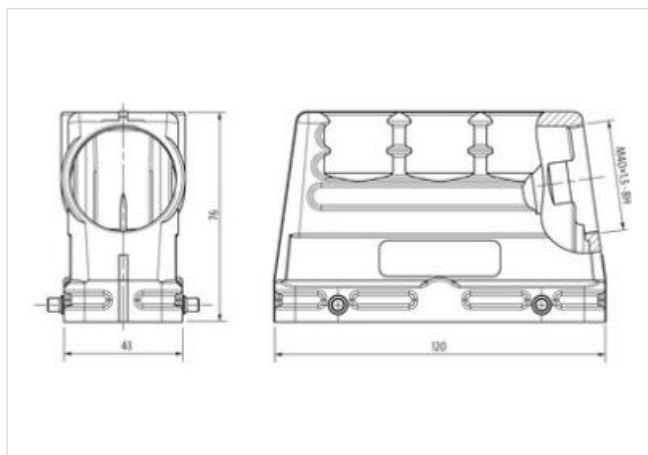
B24

Hood (high)

Double locking lever

IP67

Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879653909
Pakkauskoko	1
Tullinumero	85389099

Installation

Cable outlet	laterally
--------------	-----------

Installation | Connection

Mounting set	M40
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Hood
--------------	------

Mechanical data | Material data

Coating housing	powder-coated
Coating locking	verzinkt
Material housing	Aluminum die casting
Locking material	Steel
Mechanical data Mounting data	
Size	B24
Height	76 mm
Width	43 mm
Depth	120 mm
Looking techniques	Double locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21