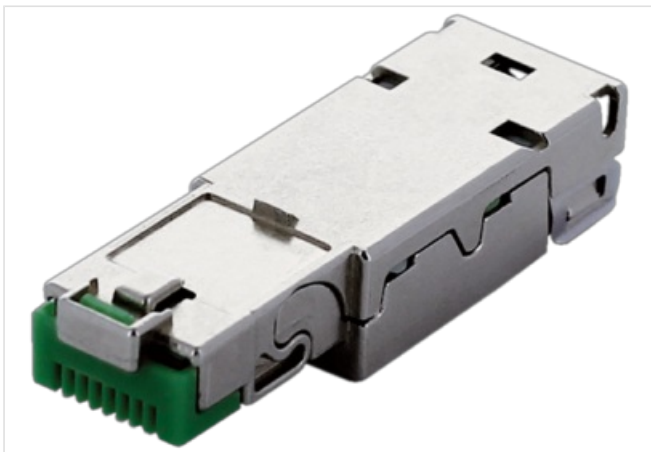


**RJ45 IP20 MALE 0° 8 pol.-0,14 mm²...0,25 mm²**

Male  
RJ45  
8-pole, shielded  
for 70MH-MAL10-0010000  
Technical data will be only guaranteed with Murrelektronik components.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27261204      |
| ECLASS-7.0  | 27440205      |
| ECLASS-8.0  | 27440205      |
| ECLASS-9.0  | 27440205      |
| ETIM-5.0    | EC002636      |
| GTIN        | 4048879751827 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

**Electrical data | Supply**

|                      |        |
|----------------------|--------|
| Operating voltage AC | 50 V   |
| Operating voltage DC | 50 V   |
| Operating current    | 1,75 A |

**Industrial communication**

|                             |             |
|-----------------------------|-------------|
| Transfer parameters         | CAT5        |
| Data transmission rate max. | 1000 MBit/s |

**Installation**

|                               |          |
|-------------------------------|----------|
| Connection cross section min. | 0,14 mm² |
| Connection cross section max. | 0,25 mm² |

**Installation | Connection**

|                               |                |
|-------------------------------|----------------|
| Wire insulation diameter min. | 1,6 mm         |
| Connection                    | Cut clamps IDC |
| Family construction form      | RJ45           |
| Mating cycles min.            | 750            |

**Installation | Pin assignment**

No. of poles 8

**Device protection | Electrical**

Overvoltage category (EN 60950-1) I

**Mechanical data | Material data**

Coating contact gold plated

Combustibility class (UL94) V-0

Material housing Zinc die-casting

Material contact Copper alloy

Material contact carrier PC

**Mechanical data | Mounting data**

Height 9,5 mm

Width 13,7 mm

Depth 43,5 mm

**Environmental characteristics | Climatic**

Operating temperature min. -40 °C

Operating temperature max. 70 °C