

M12 female 0° L-coded field-wireable5-pol. max. 2,5mm²

Customized printing and packaging

Female straight

M12

5-pole

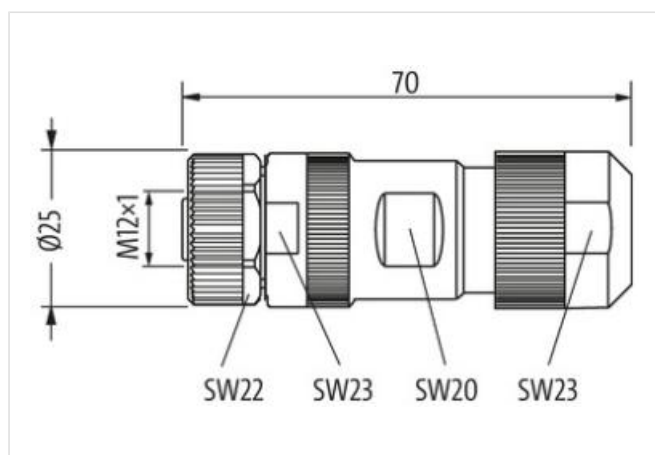
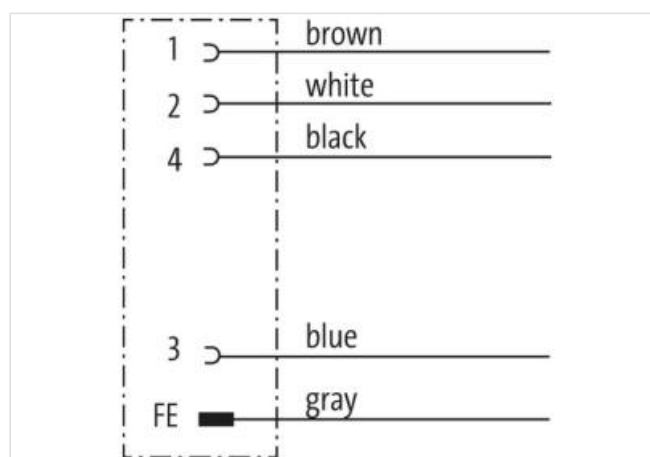
L-coded

Screw terminals

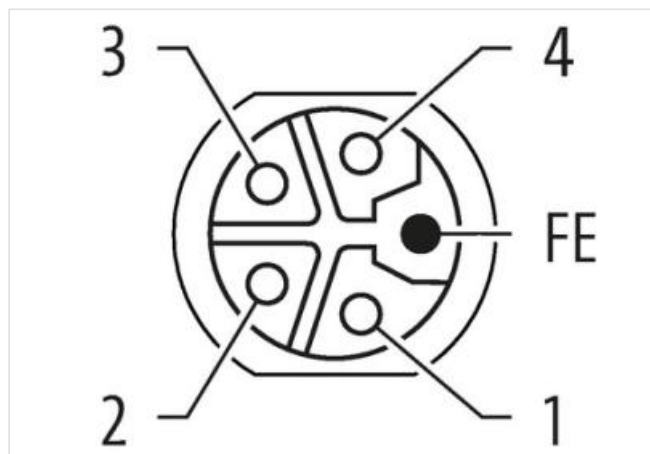
Sealing range (cable Ø)

8...13 mm

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Family construction form

M12P

Coding	L
Material contact	Copper alloy
Kaupalliset tiedot	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC001855
GTIN	4065909044117
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage DC max.	63 V
Current operating per contact max.	16 A
Installation	
Connection cross section max.	2,5 mm ²
Installation Connection	
Connection	Screw terminals SK
Mounting set	M12 x 1
Mating cycles min.	100
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1,5 kV
Material group (IEC 60664-1)	II
Overvoltage category (EN 60950-1)	III
Mechanical data Material data	
Coating contact	gold plated
Material housing	PA
Material contact carrier	PA
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Clamping range min.	8 mm
Clamping range max.	13 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C