



MVP8N-MK10D

Exact8, 10xM8, 3-pole, basic housing

10-way, 3-pole  
Inline face or side mounting  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen

Kuvat

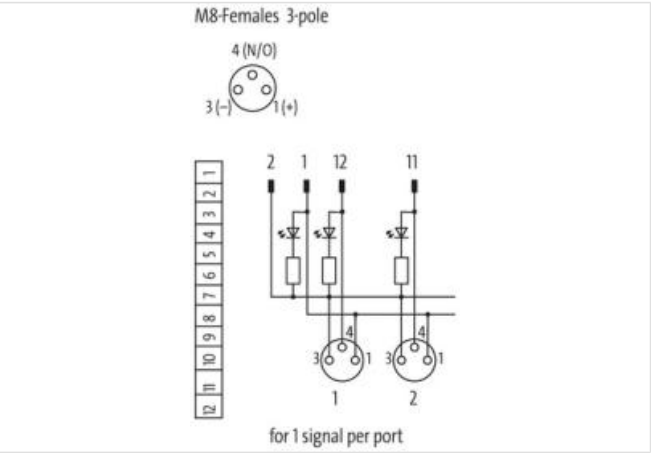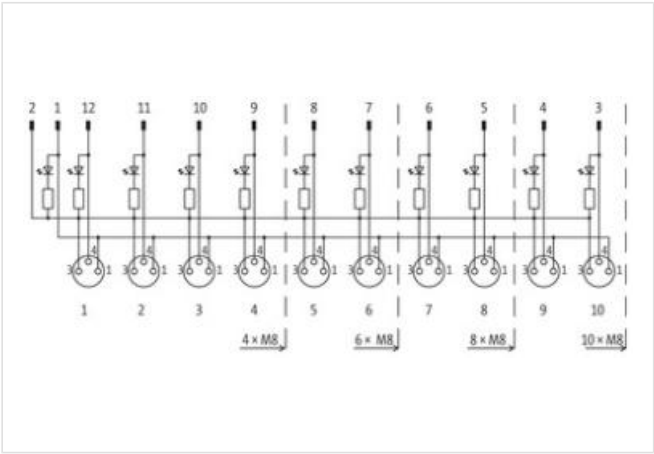

Tuote voi erota kuvassa olevasta



| Kaupalliset tiedot |          |
|--------------------|----------|
| ECLASS-6.0         | 27279219 |
| ECLASS-6.1         | 27279219 |
| ECLASS-7.0         | 27279219 |
| ECLASS-8.0         | 27279219 |
| ECLASS-9.0         | 27440108 |

|             |               |
|-------------|---------------|
| ECLASS-10.1 | 27440111      |
| ECLASS-11.1 | 27440111      |
| ECLASS-12.0 | 27440111      |
| ETIM-5.0    | EC002585      |
| GTIN        | 4048879057028 |
| Pakkauskoko | 1             |
| Tullinumero | 85369010      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 2 A  |
| Total current max.                 | 8 A  |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 70 °C                      |
| Additional condition temperature range | depending on cable quality |

**Connection type 2**

|                          |             |
|--------------------------|-------------|
| Family construction form | Cap         |
| No. of poles             | 12          |
| PIN 1                    | Bu 1 Pin 1  |
| PIN 2                    | Bu 1 Pin 2  |
| PIN 3                    | Bu 1 Pin 3  |
| PIN 4                    | Bu 1 Pin 4  |
| PIN 5                    | Bu 2 Pin 1  |
| PIN 6                    | Bu 2 Pin 2  |
| PIN 7                    | Bu 2 Pin 3  |
| PIN 8                    | Bu 2 Pin 4  |
| PIN 9                    | Bu 3 Pin 1  |
| PIN 10                   | Bu 3 Pin 2  |
| PIN 11                   | Bu 3 Pin 3  |
| PIN 12                   | Bu 3 Pin 4  |
| PIN 13                   | Bu 4 Pin 1  |
| PIN 14                   | Bu 4 Pin 2  |
| PIN 15                   | Bu 4 Pin 3  |
| PIN 16                   | Bu 4 Pin 4  |
| PIN 17                   | Bu 1 Pin 5  |
| PIN 18                   | Bu 2 Pin 5  |
| PIN 19                   | Bu 3 Pin 5  |
| PIN 20                   | Bu 4 Pin 5  |
| PIN 21                   | Br 1 - Br 4 |
| Family construction form | M8          |
| Gender                   | female      |
| Color contact carrier    | black       |
| Coding                   | A           |
| No. of poles             | 3           |
| PIN 1                    | +           |
| PIN 3                    | -           |
| PIN 4                    | S           |