

**EXACT12, 8XM12, 5-POLE, CON. M23 19 POLE**

Without con. cable

8-way, 5-pole

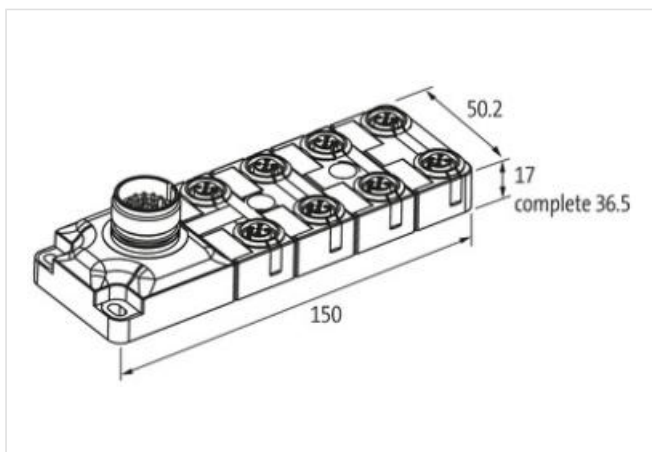
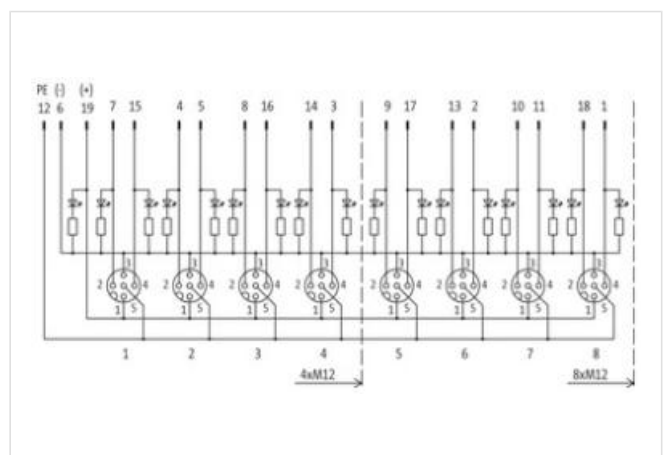
M23 plug connection

19-pole used

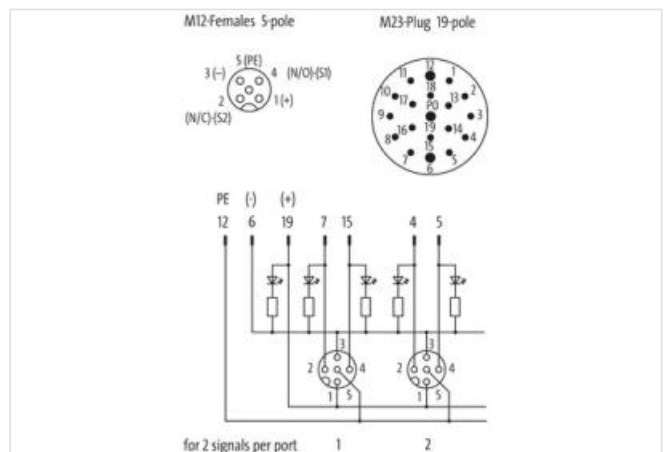
with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Linkki tuotteeseen](#)****Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |

|             |               |
|-------------|---------------|
| ECLASS-8.0  | 27279219      |
| ECLASS-9.0  | 27440108      |
| ECLASS-10.1 | 27440111      |
| ECLASS-11.1 | 27440111      |
| ECLASS-12.0 | 27440111      |
| ETIM-5.0    | EC002585      |
| GTIN        | 4048879053860 |
| Pakkauskoko | 1             |
| Tullinumero | 85369010      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 8 A  |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 80 °C  |

**Connection type 2**

|                          |        |
|--------------------------|--------|
| Family construction form | M12    |
| Gender                   | female |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 5      |
| PIN 1                    | +      |
| PIN 2                    | NC S 2 |
| PIN 3                    | -      |
| PIN 4                    | NO S 1 |
| PIN 5                    | PE     |
| Family construction form | M23    |
| Gender                   | male   |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 19     |