



MICO electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V DC / 1-2-4-6 A

MICO 4.6  
4 channels  
Current adjustment 1, 2, 4, 6 A

Linkki tuotteeseen

Kuvat

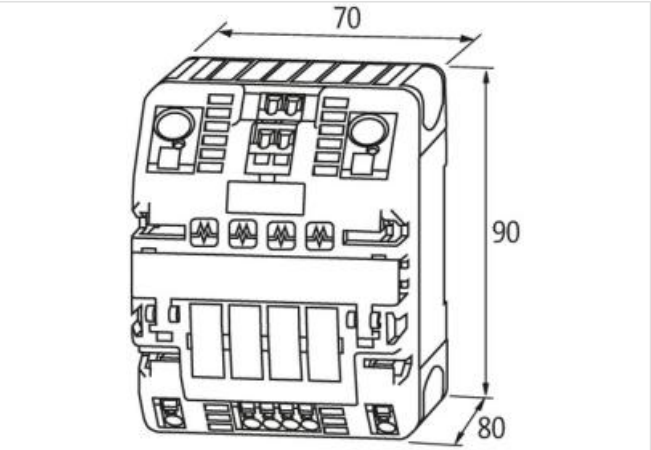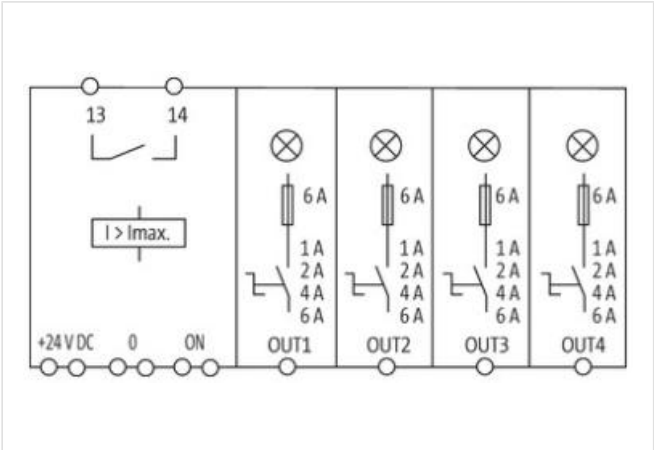

Tuote voi erota kuvassa olevasta



| Kaupalliset tiedot |          |
|--------------------|----------|
| ECLASS-6.0         | 27371802 |
| ECLASS-6.1         | 27371802 |
| ECLASS-7.0         | 27371802 |
| ECLASS-8.0         | 27371802 |
| ECLASS-9.0         | 27371802 |
| ECLASS-10.1        | 27371802 |

|             |               |
|-------------|---------------|
| ECLASS-11.1 | 27371802      |
| ECLASS-12.0 | 27371802      |
| ETIM-5.0    | EC001440      |
| GTIN        | 4048879000055 |
| Pakkauskoko | 1             |
| Tullinumero | 85363010      |

#### Electrical data | Input

|                                          |       |
|------------------------------------------|-------|
| Input voltage DC                         | 24 V  |
| Input voltage DC min.                    | 18 V  |
| Input voltage DC max.                    | 30 V  |
| ON input voltage control inputs min.     | 10 V  |
| ON input voltage control inputs max.     | 30 V  |
| ON pulse length control inputs high min. | 20 ms |
| Total current bridge set max.            | 40 A  |

#### Electrical data | Output

|                                     |        |
|-------------------------------------|--------|
| Switch-on capacity per channel max. | 20 mF  |
| Switching voltage AC max.           | 30 V   |
| Switching voltage DC max.           | 30 V   |
| Switching current max.              | 100 mA |

#### Installation

|                                                                |                     |
|----------------------------------------------------------------|---------------------|
| Connection cross-section inputs max.                           | 16 mm <sup>2</sup>  |
| Connection cross-section outputs max.                          | 4 mm <sup>2</sup>   |
| Connection cross-section control inputs / control outputs max. | 2,5 mm <sup>2</sup> |

#### Mechanical data | Mounting data

|                            |                                |
|----------------------------|--------------------------------|
| Mounting method            | geschnappt                     |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height                     | 90 mm                          |
| Width                      | 70 mm                          |
| Depth                      | 80 mm                          |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | 0 °C   |
| Operating temperature max. | 55 °C  |
| Storage temperature min.   | -40 °C |
| Storage temperature max.   | 80 °C  |

#### Connection type 11

|                          |                  |
|--------------------------|------------------|
| Family construction form | Bridging Contact |
| Gender                   | female           |
| Color contact carrier    | black            |
| No. of poles             | 1                |
| PIN 1                    | 24 V DC          |
| Family construction form | Bridging Contact |
| Gender                   | female           |
| Color contact carrier    | black            |
| No. of poles             | 1                |
| PIN 1                    | 0 V              |
| Family construction form | Bridging Contact |
| Gender                   | female           |
| Color contact carrier    | black            |
| No. of poles             | 2                |
| PIN 1                    | On               |
| PIN 2                    | 13               |

|                          |                           |
|--------------------------|---------------------------|
| Family construction form | Bridging Contact          |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 2                         |
| PIN 1                    | On                        |
| PIN 2                    | 14                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 1                         |
| PIN 1                    | 24 V DC                   |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 1                         |
| PIN 1                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | Out 1                     |
| PIN 2                    | Out 1                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | Out 2                     |
| PIN 2                    | Out 2                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | Out 3                     |
| PIN 2                    | Out 3                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | Out 4                     |
| PIN 2                    | Out 4                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 4                         |
| PIN 1                    | On                        |
| PIN 2                    | On                        |
| PIN 3                    | 13                        |

PIN 4

14