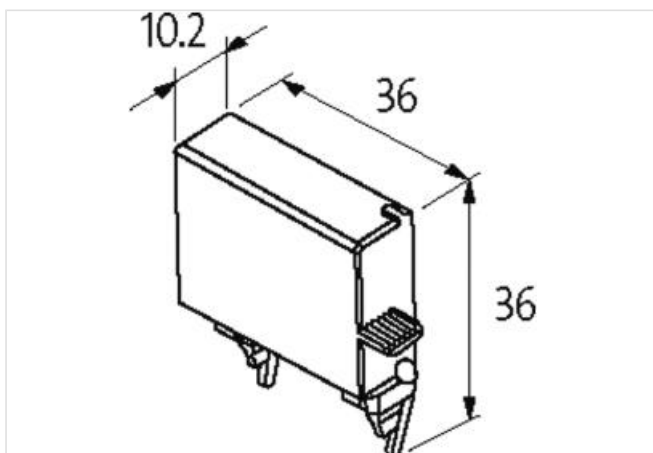
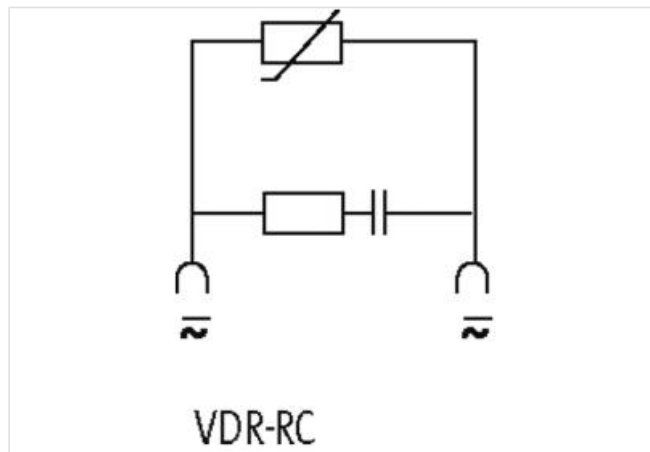


SUPPRESSOR FOR SIEMENS CONTACTOR

VDR+RC, 24...48 VAC/DC, 20 VA/W

 24 V AC/DC
 RC + Varistor

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta


Kaupalliset tiedot

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013

ETIM-5.0	EC002498
GTIN	4048879019934
Pakkauskoko	1
Tullinumero	85363010
Compatibility Compatible with	
Appropriate contactors	3 RT 1.3/1.4
Electrical data	
Damping factor	1.5× UN
Electrical data Input	
Input voltage AC min.	24 V
Input voltage AC max.	70 V
Input voltage DC min.	24 V
Input voltage DC max.	70 V
Installation Connection	
Connection information	Plug contact
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Mechanical data Mounting data	
Height	36 mm
Width	10,2 mm
Depth	36 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C