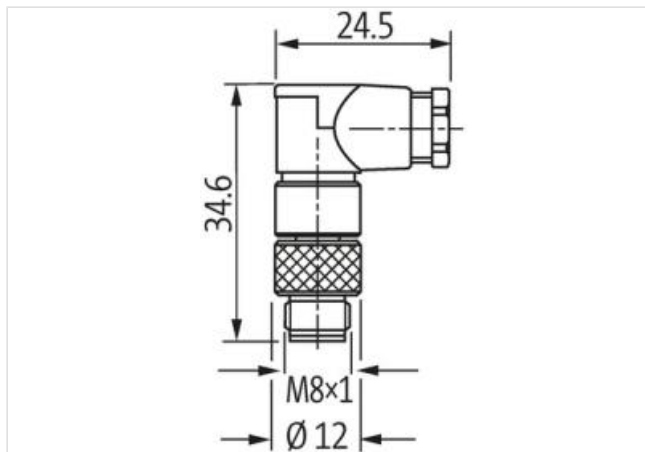
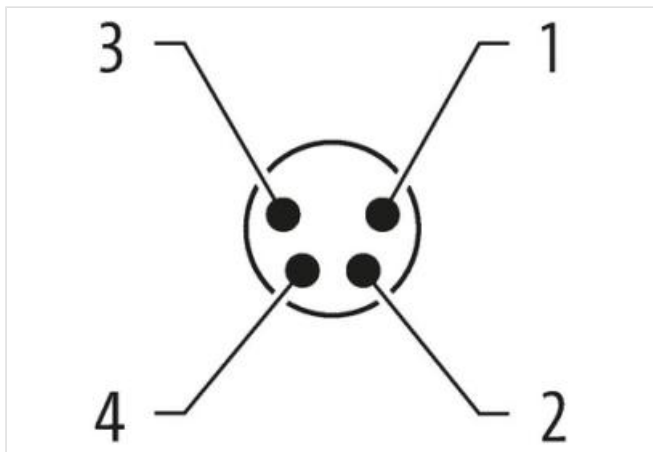
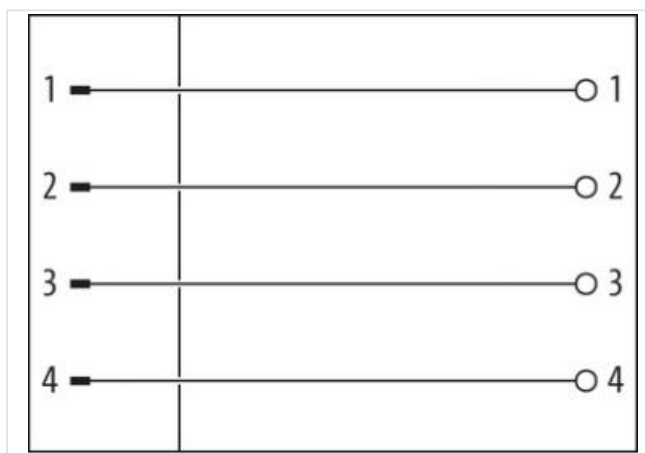


**M8 male 90° A-cod. solder pins**4-pol., 0.25mm<sup>2</sup>, 3,5 - 5mm

Male 90°

M8, 4-pole

with solder pins

Connection cross section: max. 0.25 mm<sup>2</sup>[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

|                                     |      |
|-------------------------------------|------|
| Family construction form            | M8   |
| Degree of protection (EN IEC 60529) | IP67 |

**Kaupalliset tiedot**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279221 |
| ECLASS-7.0  | 27440104 |
| ECLASS-8.0  | 27440104 |
| ECLASS-9.0  | 27440102 |
| ECLASS-10.1 | 27440102 |
| ECLASS-11.1 | 27440102 |
| ECLASS-12.0 | 27440116 |

|                                          |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ETIM-5.0                                 | EC001855                                                                                                                                              |
| GTIN                                     | 4048879224635                                                                                                                                         |
| Pakkauskoko                              | 1                                                                                                                                                     |
| Tullinumero                              | 85366990                                                                                                                                              |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC max.                | 30 V                                                                                                                                                  |
| Operating voltage DC max.                | 30 V                                                                                                                                                  |
| Current operating per contact max.       | 4 A                                                                                                                                                   |
| Installation                             |                                                                                                                                                       |
| Connection cross section max.            | 0,25 mm²                                                                                                                                              |
| Rotation option                          | 90° (4 coding options)                                                                                                                                |
| Device protection   Electrical           |                                                                                                                                                       |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Mechanical data   Mounting data          |                                                                                                                                                       |
| Clamping range min.                      | 3,5 mm                                                                                                                                                |
| Clamping range max.                      | 5 mm                                                                                                                                                  |
| Height                                   | 34,5 mm                                                                                                                                               |
| Width                                    | 18,5 mm                                                                                                                                               |
| Depth                                    | 12 mm                                                                                                                                                 |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |